

Electrical
Standard: UL IEC
Rated Voltage: 300V 250V
Rated Current: 15A 12A
Contact Resistance: 20mΩ
Insulation Resistance: 500MΩ / DC 500V
With standing Voltage: AC 2000V for one min
Wire range:28~12AWG 2.5mm²

Mechanical
Strip Length: 8-9mm
Temp. Range: -40°C ~ +105°C

Dimensions
Pitch:7.62mm
Poles:2-24P

Material
Housing: PA66, UL94V-0
Wire guard:Stainless Steel
Clamp:Phosphor Bronze,Tin Plated

ORDER INFORMATION

5 T M 7 6 2 N - W 0 1 N x x O L B - 0 1





762:
Pitch 7.62mm

Series No.

No of Pins total
(02~24)

O:Orange

B:Bag

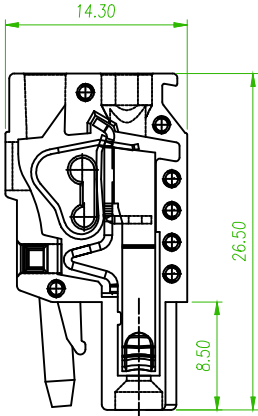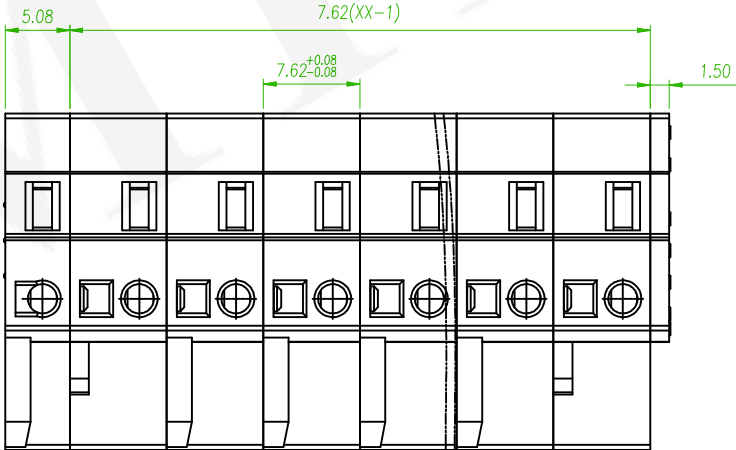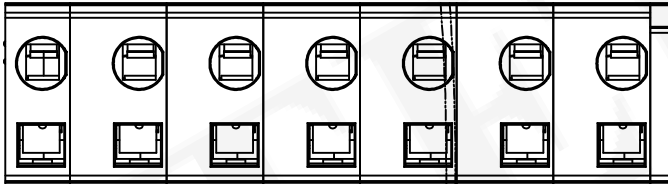

linear dimension(Tolerances Standard GB/T 14486-2008)								—	∥	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 250	to 10	over 10 to 100	over 100 to 250
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
	ECN NO:200718 Revise the Tolerance	Alice	2020/11/04

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	Terminal Block			頁數 Page	1/1
	品號 PART NO.	5TM762N-W01NxxOLB-01			繪圖 DRAWN	Mia 2015/03/10
	圖號 DRAWING NO.	GN011-AL472	版本 REV.	B	核對 CHECKED	Wanling 2015/03/10
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Joey 2015/03/10
	公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION	