

Electrical

Standard: UL IEC
 Rated Voltage: 300V 250V
 Rated Current: 15A 12A
 Contact Resistance: 20mΩ
 Insulation Resistance: 500MΩ / DC 500V
 With standing Voltage: AC 2000V for one min
 Wire range: 28~12AWG 2.5mm²

Mechanical

Strip Length: 8-9mm
 Temp. Range: -40°C ~ +105°C






Dimensions

Pitch: 7.62mm
 Poles: 2-24P

Material

Housing: PA66, UL94V-0
 Wire guard: Stainless Steel
 Clamp: Phosphor Bronze, Tin Plated

ORDER INFORMATION

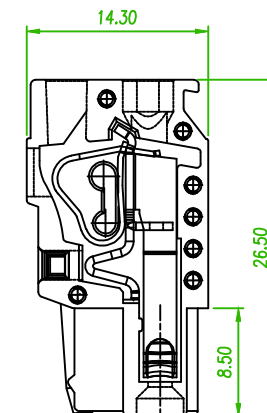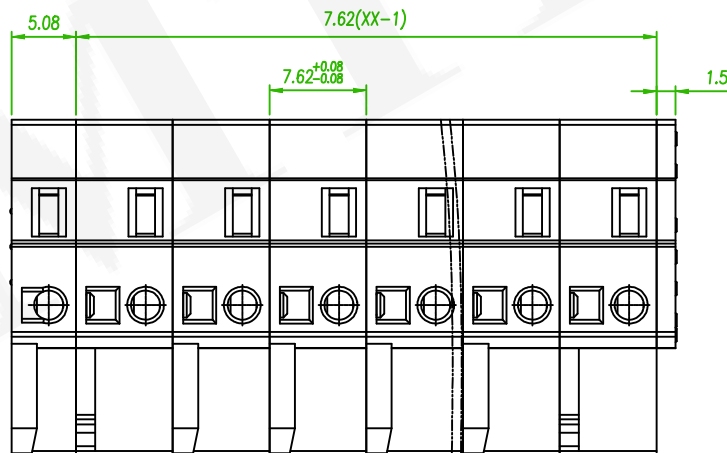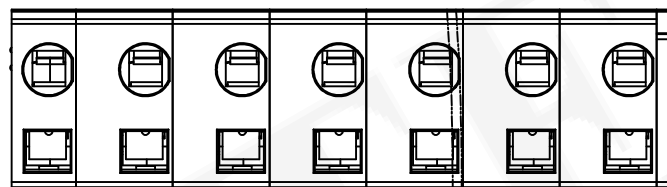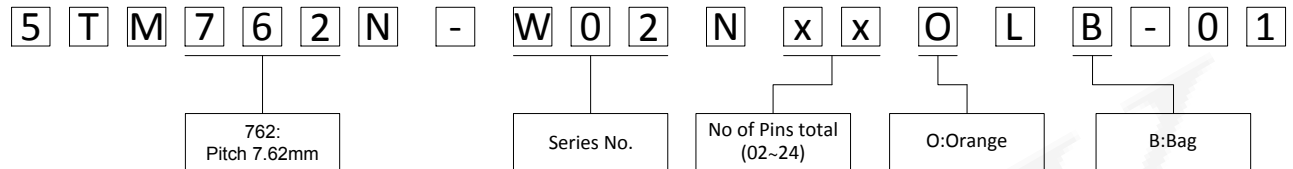

linear dimension (Tolerances Standard GB/T 14486-2008)



variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to 100	
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60



ECN NO:200718 Revise the Tolerance

Alice

2020/11/04

REV. ECN NO. OR DESCRIPTION

REVISED

DATE



糧德精密有限公司
 Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名 TITLE	Terminal Block				頁數 Page	1/1
品號 PART NO.	5TM762N-W02NxxOLB-01			繪圖 DRAWN	Mia 2015/03/10	
圖號 DRAWING NO.	GN011-AL471	版本 REV.	B	核對 CHECKED	Wanling 2015/03/10	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Joey 2015/03/10	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		