

Electrical
Standard: UL IEC
Rated Voltage: 300V 250V
Rated Current: 15A 12A
Contact Resistance: 20mΩ
Insulation Resistance: 500MΩ / DC 500V
With standing Voltage: AC 2000V for one min
Wire range:28~12AWG 2.5mm²

Mechanical
Strip Length: 8-9mm
Temp. Range: -40℃ ~ +105℃

Dimensions
Pitch:7.62mm
Poles:2-24P

Material
Housing: PA66, UL94V-0
Wire guard:Stainless Steel
Clamp:Phosphor Bronze,Tin Plated

ORDER INFORMATION

5 T M 7 6 2 N - W 0 5 E x x O L B - 0 1


762:
Pitch 7.62mm

Series No.




No of Pins total
(02~24)

O:Orange

B:Bag

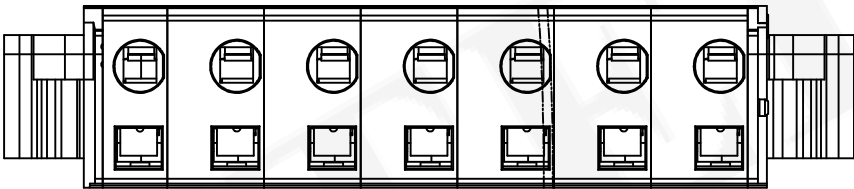

AMTEK 耀德
2020.11.30
Released DCC

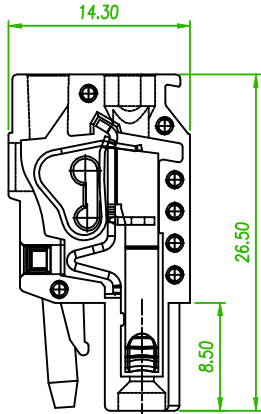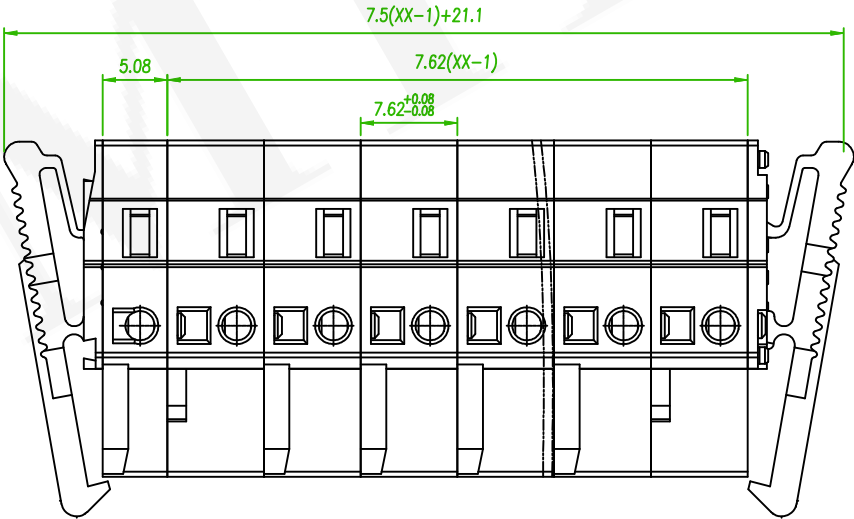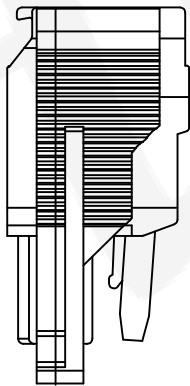

linear dimension(Tolerances Standard GB/T 14486-2008)								—	∕	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
	ECN NO:200718 Revise the Tolerance	Alice	2020/11/05

耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	Terminal Block				頁數 Page	1/1
品號 PART NO.	5TM762N-W05ExxOLB-01				繪圖 DRAWN	Mia 2015/03/10
圖號 DRAWING NO.	GN011-AL478	版本 REV.	B	核對 CHECKED	Wanling 2015/03/10	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Joey 2015/03/10	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		