

Standard:	UL	IEC
Rated Voltage:	300V	250V
Rated Current:	15A	16A
Contact Resistance:	20mΩ	
Withstanding Voltage:	AC 2000V	
Insulation Resistance:	500MΩ	
Wire range:	28-12AWG 2.5mm ²	

ORDER INFORMATION



Diagram illustrating the structure of the 16-digit barcode:

5	T	M	7	6	2	N	-	W	0	7	E	X	X	O	L	X	-	0	1
in				Series No.				Poles (02-24P)				O:Orange				A:Tray B:Bag			

\MECHANICAL

Temp. Range: -40°C ~ +105°C




Steip length: 8-9mm

MATERIAL

Housing: PA66, UL94V-0

Clamp: Copper alloy, Tin plated

Wire guard: Stainless steel

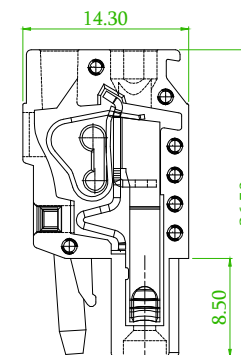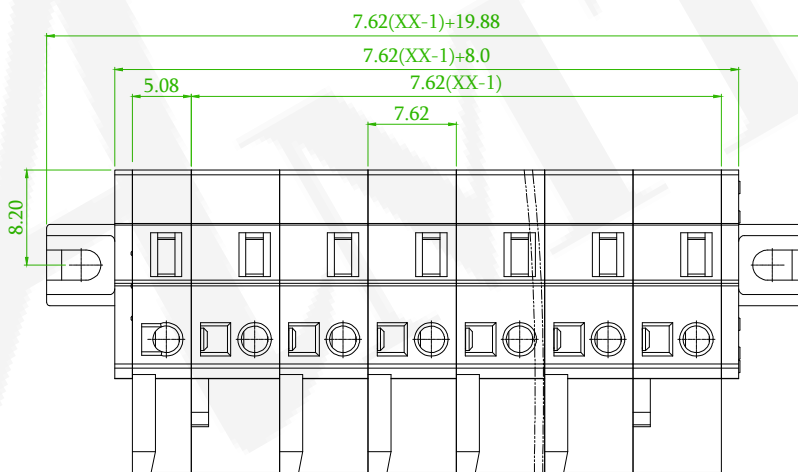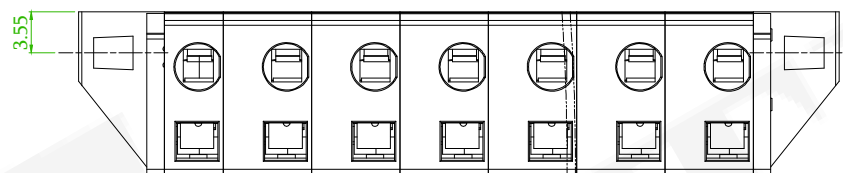

linear dimension(Tolerances Standard GB/T 14486-2008)

—  

variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

	ECN NO:200718 Revise the Tolerance	Alice	2
REV.	ECN NO. OR DESCRIPTION	REVISED	



糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	7.62mm Terminal Block				頁數 Page	1/1
品號 PART NO.	5TM762N-W07EXXOLX-01			繪圖 DRAWN	Eric 2019/01/03	
圖號 DRAWING NO.	GN011-EA438	版本 REV.	B	核對 CHECKED	Josh 2019/01/03	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2019/01/03	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		