

ELECTRICAL

Standard: UL IEC
 Rated Voltage: 300V 250V
 Rated Current: 15A 16A

Contact Resistance: 20mΩ

Withstanding Voltage: AC 2000V for one min

Insulation Resistance: 500MΩ

Wire range: 28-12AWG 2.5mm²

MECHANICAL

Temp. Range: -40°C ~ +105°C

Steip length: 8-9mm

MATERIAL

Housing: PA66, UL94V-0

Clamp: Copper alloy, Sn plated

Wire guard: Stainless steel

ORDER INFORMATION

5 T M 7 6 2 N - W 0 8 E X X O L X - 0 1

Series No.

Poles
(02-24P)

O:Orange


A:Tray
B:Bag



AMTEK 羅德

2020.11.30

Released DCC

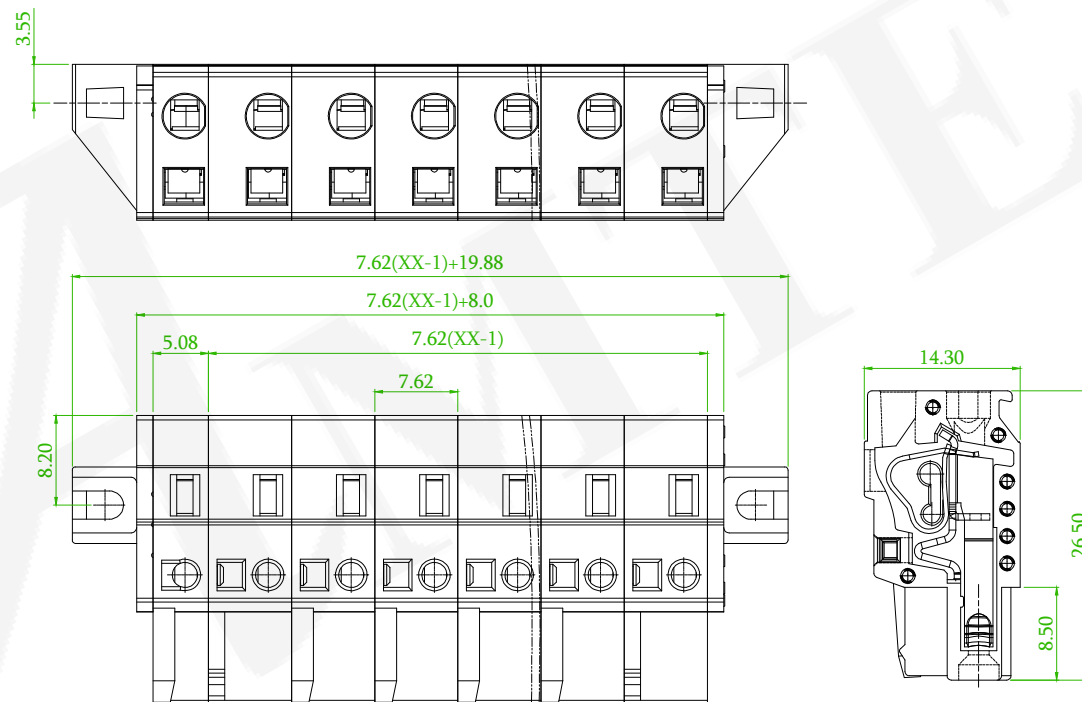

linear dimension(Tolerances Standard GB/T 14486-2008)



variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	to 10	over 10 to 100	over 100 to 100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

AMTEK
 羅德精密有限公司
 Amtek Technology Co., Ltd.
 TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名 TITLE	7.62mm Terminal Block				頁數 Page	1/1
品號 PART NO.	5TM762N-W08EXXOLX-01				繪圖 DRAWN	Eric 2019/01/03
圖號 DRAWING NO.	GN011-EA440		版本 REV.	B	核對 CHECKED	Josh 2019/01/03
客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Jason 2019/01/03
公差 TOLERANCE			單位 UNIT	mm	THIRD ANGLE PROJECTION	

ECN NO:200718 Revise the Tolerance

Alice

2020/11/05

ECN NO. OR DESCRIPTION

REVISED

DATE



REV.