

ELECTRICAL

Standard: UL IEC
Rated Voltage: 300V 250V
Rated Current: 15A 16A
Contact Resistance: 20mΩ
Insulation Resistance: 500MΩ / DC 500V
Withstanding Voltage: AC 2000V for one minute

MECHANICAL

Temp. Range: -40°C ~ +105°C
Max Soldering: +250°C for 5sec

Dimensions

Pitch: 7.62mm
Poles: 2-24P

MATERIAL

Housing: PA66, UL94V-0
Pin header: Copper alloy, Sn plated

ORDER INFORMATION


5 T M 7 6 2 R - W 0 4 N X X O L X - 0 1

Series No.




No of Pins total
(02-24)

O: Orange

A: Tray
B: Bag

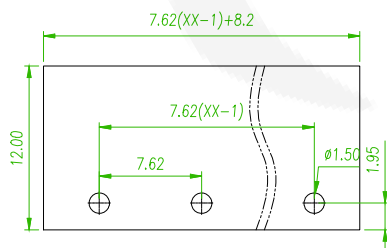

P.C.B. LAYOUT

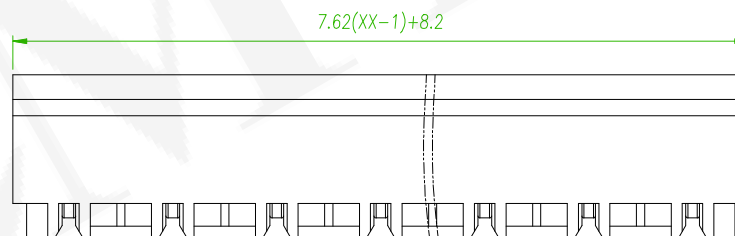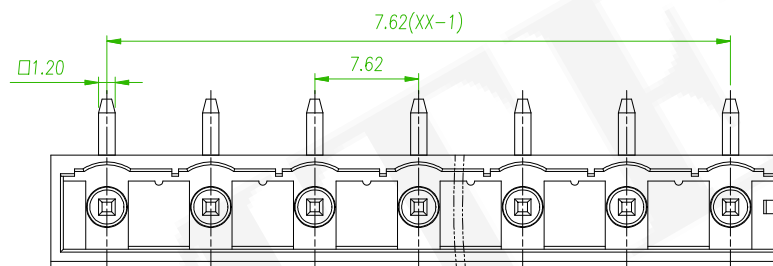

linear dimension (Tolerances Standard GB/T 14486-2008)



variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
1	ECN NO: 200718 Revise the Tolerance	Alice	2020/11/05



糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	Terminal Block				頁數 Page	1/1
品號 PART NO.	5TM762R-W04NXXOLX-01				Benson	2020/02/03
圖號 DRAWING NO.	GN011-BS804	版本 REV.	B	繪圖 DRAWN	核對 CHECKED	Josh 2020/02/03
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	承認 APPROVED	Josh 2020/02/03
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		