

ELECTRICAL

Standard: UL IEC
 Rated Voltage: 300V 320V
 Rated Current: 15A 10A
 Contact Resistance: 20mΩ
 Withstanding Voltage: AC 2000V for one min
 Insulation Resistance: 500MΩ
 Wire range: 28-14AWG 2.5mm²

MECHANICAL

Temp. Range: -40°C ~ +105°C
 Torque: 0.5Nm
 Steip length: 7-8mm

MATERIAL

Housing: PA66, UL94V-0
 Screws: M3.0 Steel Zn plated
 Clamp: Copper alloy, Ni plated
 Cage: Copper alloy, Ni plated

ORDER INFORMATION


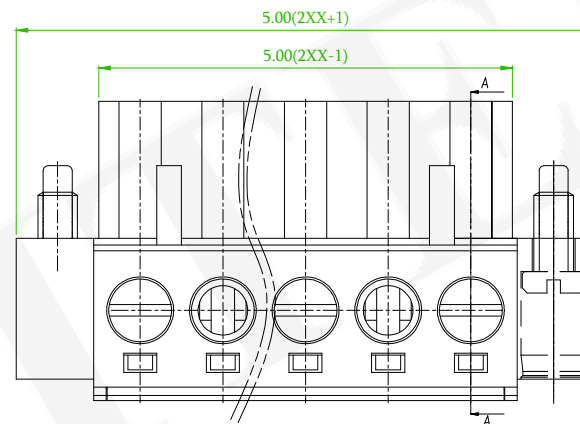
5 T P 1 0 0 N -

2 E K E X X E L X - 0 1

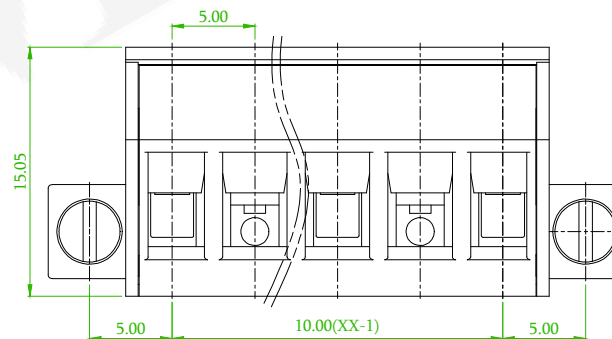
Series No.

Poles
(02-12P)

E:Green

A:Tray
B:Bag

SECTION A-A



linear dimension(Tolerances Standard GB/T 14486-2008)



variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

B.x1

ECN NO:200718 Revise the Dimension

Alice

2020/08/27

REV.

ECN NO. OR DESCRIPTION

REVISED

DATE



糧德精密有限公司
 Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名
TITLE

10.0mm Terminal Block

頁數
Page

1/1

品號
PART NO.

5TP100N-2EKEXXELX-01

繪圖
DRAWNEric
2018/12/17圖號
DRAWING NO.

GN011-EA312

版本
REV.

B

核對
CHECKEDJosh
2018/12/17客戶品號
CUSTOMER P/N比例
SCALE

None

承認
APPROVEDJason
2018/12/17公差
TOLERANCE單位
UNIT

mm

THIRD
ANGLE
PROJECTION