

Standard:	UL	IEC
Rated Voltage:	300V	1000V
Rated Current:	55A	76A
Contact Resistance:	20mΩ	
Withstanding Voltage:	AC 3500V f	
Insulation Resistance:	500MΩ	

MECHANICAL

Temp. Range: -40°C ~ +105°C

MATERIAL

Housing: PA66, UL94V-0

Pin header: Copper alloy, Sn plated

ORDER INFORMATION

5 T P 1 0 1 R -

3

E

M

E X X

X **L**

X

-

0



1

Series No.

Poles
(02-16P)

E:Green

A:Tray
B:Bag

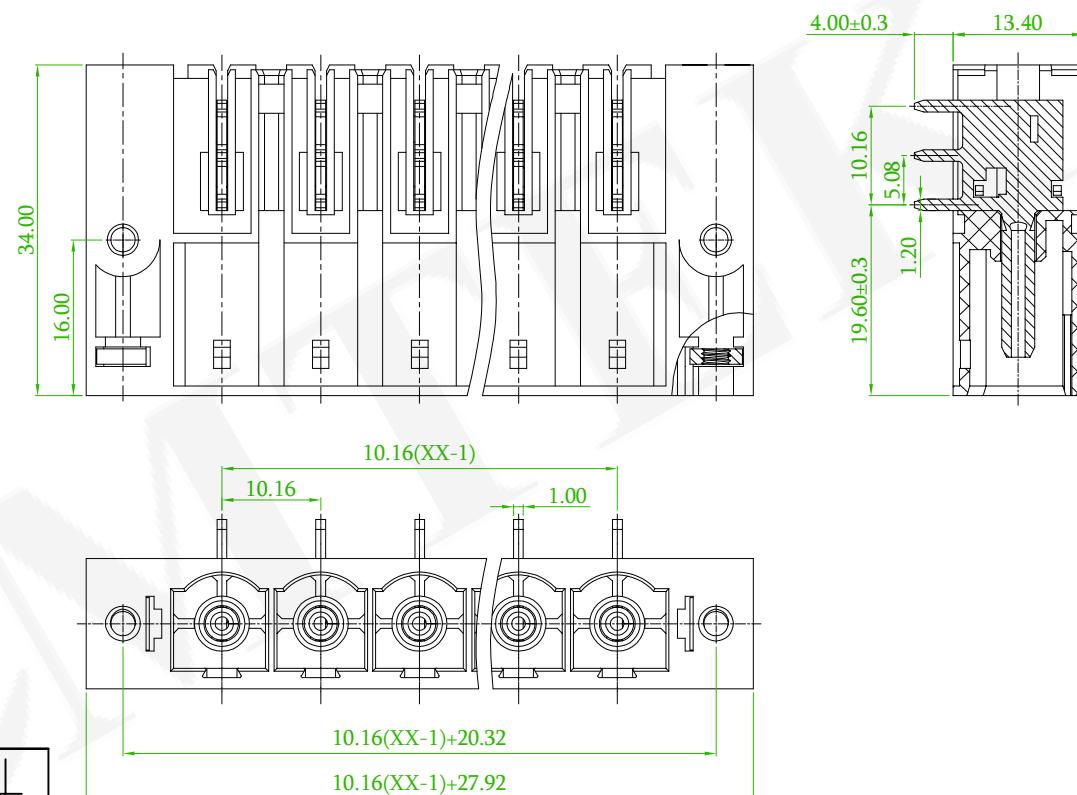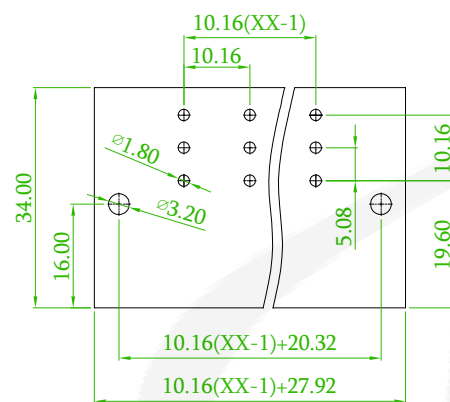

linear dimension(Tolerances Standard GB/T 14486-2008)

—  

<i>variable</i>		over 6	over 10	over 30	over 60	over 100	over 160		over 10	over 100
<i>range</i>	to 6	to 10	to 30	to 60	to 100	to 160	to	to 10	to 100	to
<i>tolerance</i>	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

	ECN NO:230714 Revise the PART NO.	Gaby	2023/09/21
 x2	ECN NO:201215 Revise the PART NO.	Alice	2020/12/30
 x1	ECN NO:200718 Revise the Dimension	Alice	2020/09/03
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	10.16mm Terminal Block				頁數 Page	1/1
品號 PART NO.	⚠ 5TP101R-3EMEXXXLX-01 ⚠			繪圖 DRAWN	Eric 2018/12/11	
圖號 DRAWING NO.	GN011-EA246		版本 REV.	D	核對 CHECKED	Josh 2018/12/11
客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Jason 2018/12/11
公差 TOLERANCE			單位 UNIT	mm	THIRD ANGLE PROJECTION	