

ORDER INFORMATION

Standard:	UL	IEC
Rated Voltage:	300V	1000V
Rated Current:	55A	76A

Contact Resistance: 20mΩ

Withstanding Voltage: AC 3500V for one min

Insulation Resistance: 500MΩ



MECHANICAL

Temp. Range: -40°C ~ +105°C

MATERIAL


Housing: PA66, UL94V-0

Pin header: Copper alloy, Sn plated

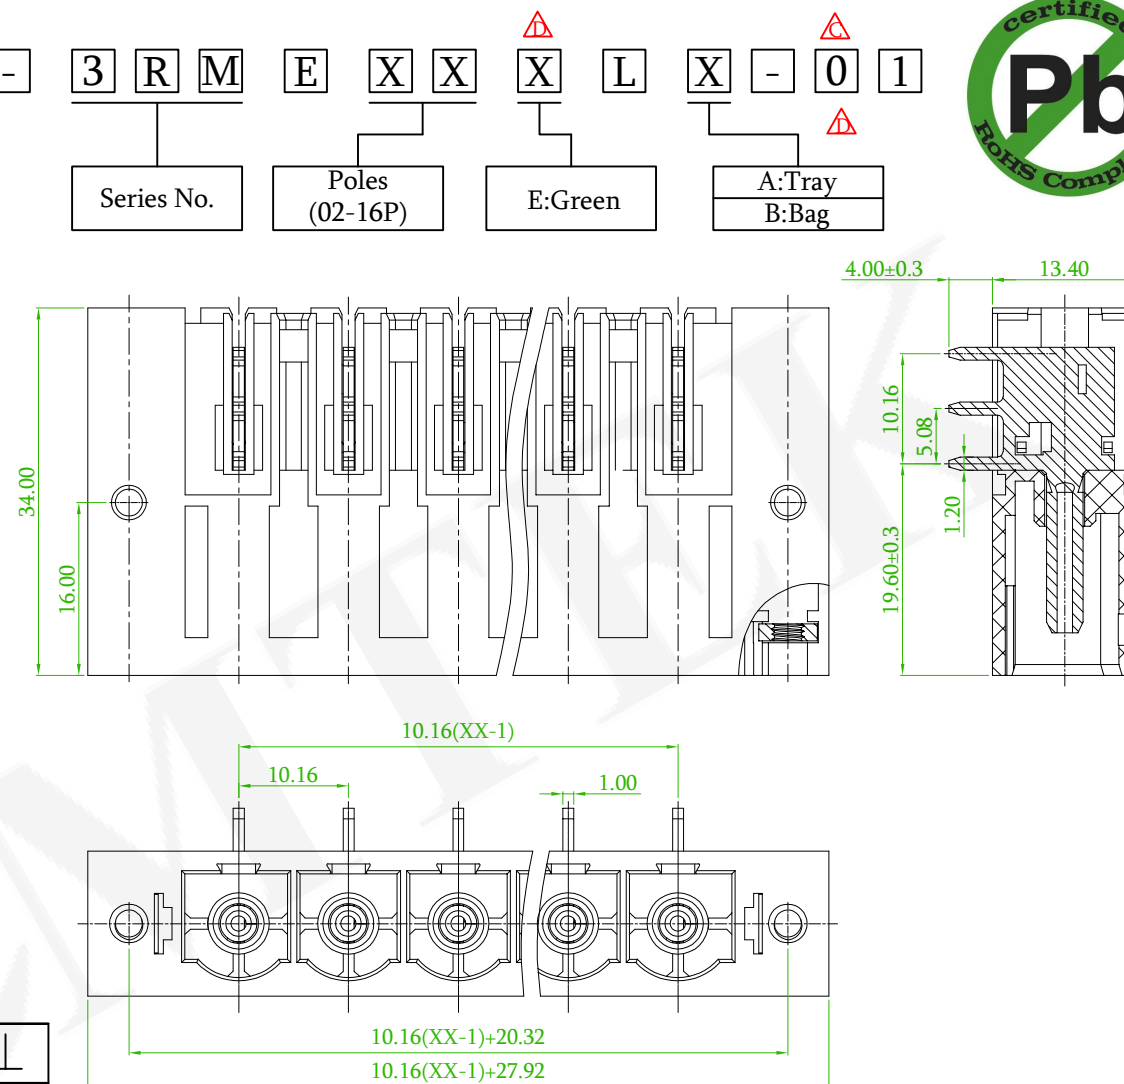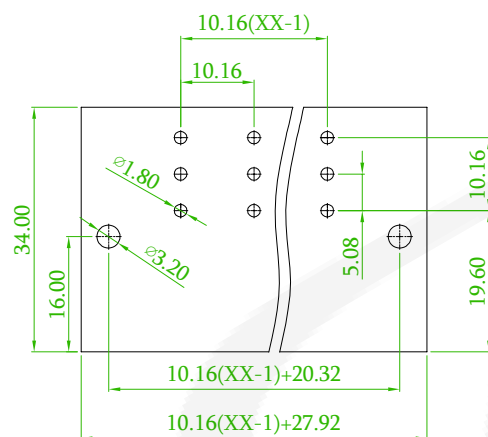

Series No.	Poles (02-16P)	E:Green	A:Tray B:Bag
------------	-------------------	---------	-----------------

linear dimension(Tolerances Standard GB/T 14486-2008)								—  		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60
	ECN NO:230714 Revise the PART NO.							Gaby	2023/09/21	
 x2	ECN NO:201215 Revise the PART NO.							Alice	2020/12/30	
 x1	ECN NO:200718 Revise the Dimension							Alice	2020/09/03	
REV.	ECN NO. OR DESCRIPTION							REVISED	DATE	



品名 TITLE	10.16mm Terminal Block				頁數 Page	1/1
品號 PART NO.	⚠ 5TP101R-3RMEXXXLX-01 ⚠		繪圖 DRAWN	Eric 2018/12/11		
圖號 DRAWING NO.	GN011-EA247	版本 REV.	D	核對 CHECKED	Josh 2018/12/11	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/12/11	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		