

ELECTRICAL

Standard: UL CUL
Voltage Rating: 300V 250V
Current Rating: 8A 8A
Contact Resistance:20mΩ
Insulation Resistance:500MΩ
Wire Range:28~16AWG 1.0mm²
Dielectric Voltage:AC 1600V for one minute ⚠

MECHANICAL




Torque:0.2Nm
Strip Length:5~6mm
Temp. Range: -40°C ~ +105°C

MATERIAL

Insulation Material: PA 66, UL94V-0
Clamp: Copper Alloy,Sn Plated
Cage:Copper Alloy,Ni Plated
Screw:M2.0,Steel,Zn Plated

ORDER INFORMATION

5	T	P	3	5	0	N	-	3	3	K	N	X	X	B	L	B	-	0	1
Series No.				No of Pins total (02~24P)				B:Black				L:RoHS + PA66							

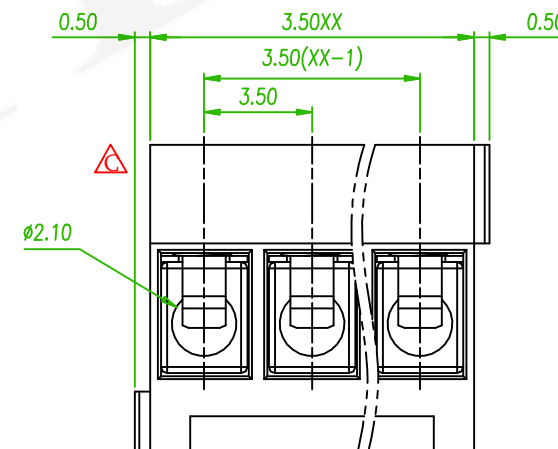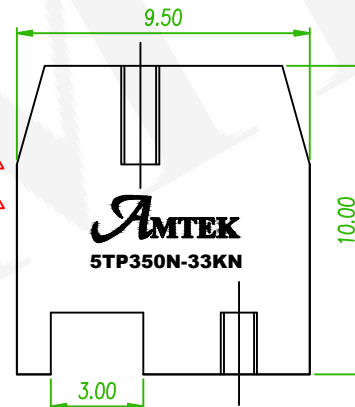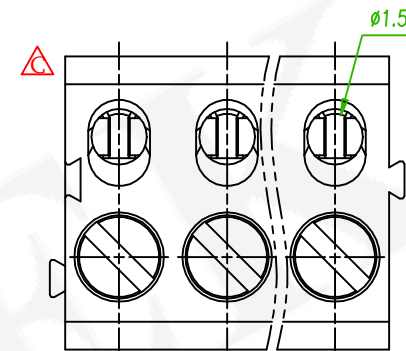

linear dimension(Tolerances Standard GB/T 14486-2008)



variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

Δx1	ECN NO:210508 Revise the Drawing	Alice	2022/07/15
Δx4	QEC NO:220606 Revise the Drawing	Alice	2022/06/30
Δx1	ECN NO:200718 Revise the Dimension	Alice	2020/09/04
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	Terminal Block				頁數 Page	1/1
品號 PART NO.	5TP350N-33KNXXBLB-01			繪圖 DRAWN	Kilin 2017/10/06	
圖號 DRAWING NO.	GN011-KL130	版本 REV.	D	核對 CHECKED	Jason 2017/10/06	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2017/10/06	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		