

ELECTRICAL

Standard: UL IEC
Rated Voltage: 300V 250V
Rated Current: 8A 10A
Contact Resistance: 20mΩ
Insulation Resistance: 500MΩ / DC 500V
Wire Range: 28~16AWG 1.5mm²
Withstanding Voltage: AC 2000V for one min

MECHANICAL

Temp. Range: -40°C ~ +105°C
Torque(Max): 0.2Nm(1.7Lb.in)
Strip Length: 6~7mm




DIMENSIONS

Pitch: 3.5mm
Poles: 2P~24P

MATERIAL

Housing: Nylon66, UL94V-0
Screws: M2.0 Steel, Zn Plated
Wire Guard: Brass Ni Plated
Clamp: Phosphor Bronze, Ni plated

ORDER INFORMATION

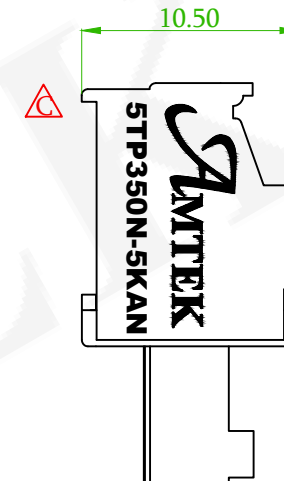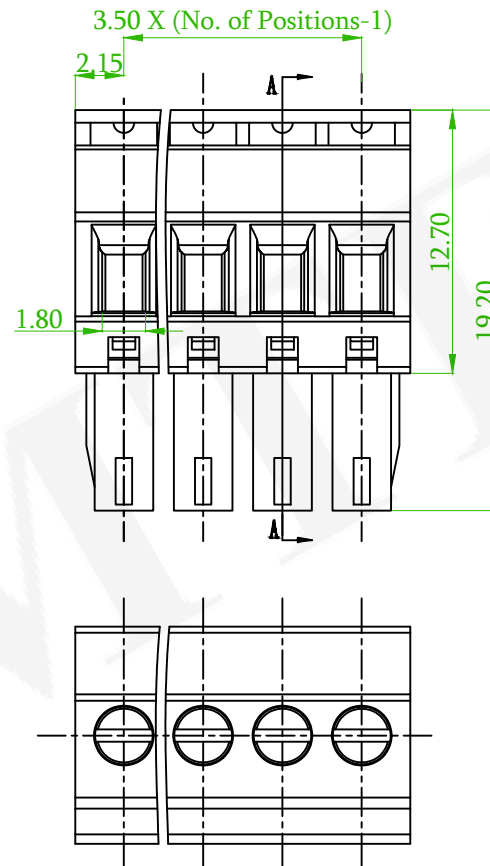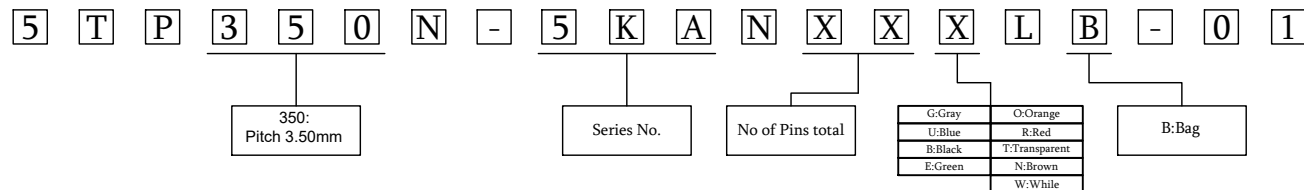

Old Part No. : TB15EKA-3.5-XXP-1X-00A-L



linear dimension(Tolerances Standard GB/T 14486-2008)



variable range	to	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
A1	ECN NO:210508 Revise the Drawing	Alice	2022/07/12
B1	ECN NO:200718 Revise the Dimension	Alice	2020/09/04



耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	Terminal Block				頁數 Page	1/1
品號 PART NO.	5TP350N-5KANXXLB-01				繪圖 DRAWN	Mia 2017/06/13
圖號 DRAWING NO.	GN011-MC465	版本 REV.	C	核對 CHECKED	Jerry 2017/06/13	
客戶品號 CUSTOMER P/N		比例 SCALE	3 : 1	承認 APPROVED	Jerry 2017/06/13	
公差 TOLERANCE	.X ± 0.20 .XX ± 0.15	單位 UNIT	mm	第三 ANGLE PROJECTION		