

ELECTRICAL

Standard: UL IEC
 Rated Voltage: 300V 250V
 Rated Current: 8A 10A
 Contact Resistance: 20mΩ
 Withstanding Voltage: AC 2000V for one min
 Insulation Resistance: 500MΩ
 Wire range: 28-16AWG 1mm²

MECHANICAL

Torque: 0.4Nm
 Strip length: 7-8mm





MATERIAL

Housing: PA66, UL94V-0
 Clamp: Phosphor bronze, Ni plated
 Wire guard: Stainless steel

ORDER INFORMATION

5 T P 3 5 0 N - 5 K D N X X X L X - 0 1

Series No. Poles (02-24P) E:Green A:Tray B:Bag

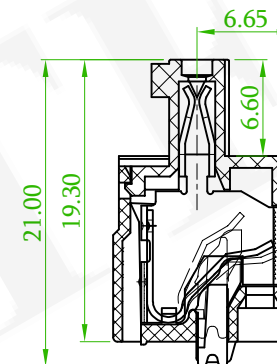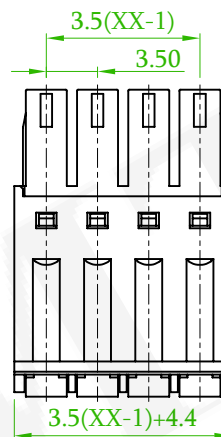

linear dimension(Tolerances Standard GB/T 14486-2008)								—	∕	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	to 10	over 10 to 100	over 100 to	
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60
REV.	ECN NO. OR DESCRIPTION							REVISED	DATE	

<p>糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030</p>	品名 TITLE	3.5mm Terminal Block			頁數 Page	1/1	
	品號 PART NO.	5TP350N-5KDNXXELX-01		繪圖 DRAWN	Eric 2018/11/19		
	圖號 DRAWING NO.	GN011-EA040	版本 REV.	c	核對 CHECKED	Josh 2018/11/19	
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/11/19	
	公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		

Add the AMTEK Logo Randy 2023/07/06
 ECN NO:200718 Revise the Dimension Alice 2020/09/04