


**ELECTRICAL**

Standard: UL IEC  
 Rated Voltage: 300V 250V  
 Rated Current: 8A 10A  
 Contact Resistance: 20mΩ  
 Insulation Resistance: 500MΩ/DC500V  
 Withstanding Voltage: AC 2000V for one minute

**ORDER INFORMATION**

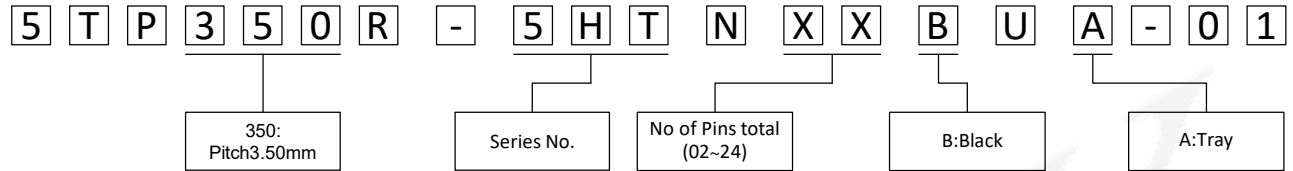


**MECHANICAL**




Temp. Range: -40°C~+130°C  
 Max Soldering: 285°C 10 Sec

**MATERIAL**

Housing: LCP, UL94V-0  
 Pin Header: Brass, Tin plated

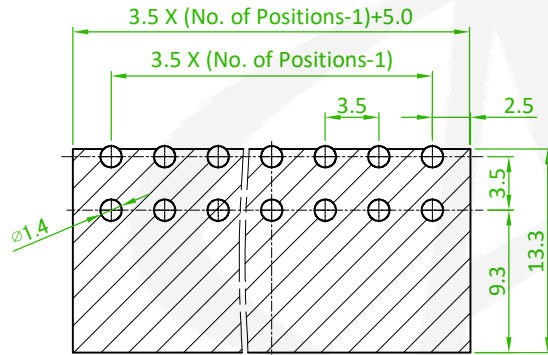

P.C.B LAYOUT  
 TOLARANCES±0.1

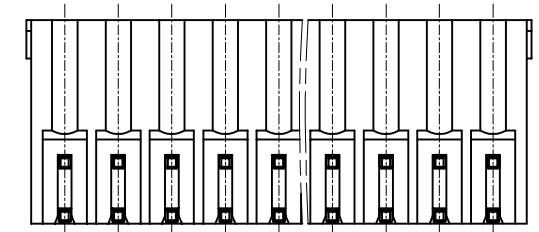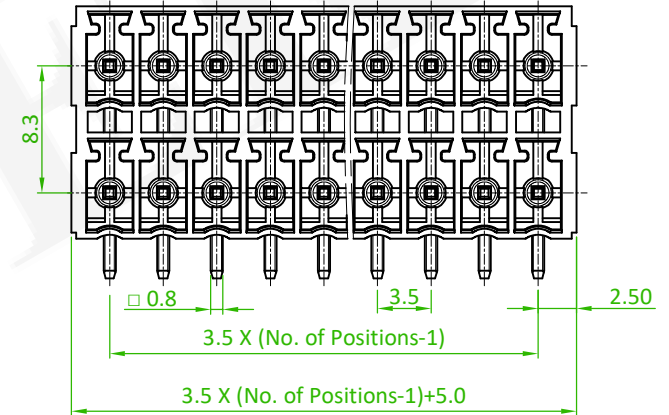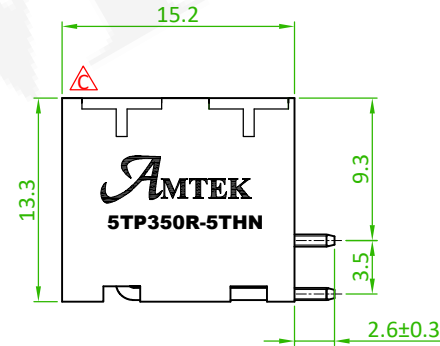

linear dimension (Tolerances Standard GB/T 14486-2008)								—	∥	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	to 10	to 100	to 100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

△x1	ECN NO:210508 Add the LOGO	Benson	2021/05/24
△x1	ECN NO:200718 Revise the Dimension	Alice	2020/09/08
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

**糧德精密有限公司**  
 Amtek Technology Co., Ltd.  
 TEL: 886-2-2260-6878  
 FAX: 886-2-2260-8030

品名 TITLE	Terminal Block			頁數 Page	1/1
品號 PART NO.	5TP350R-5HTNXXBUA-01		繪圖 DRAWN	Mia 2017/11/17	
圖號 DRAWING NO.	GN011-MC765	版本 REV.	C	核對 CHECKED	Jason 2017/11/17
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2017/11/17
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION	