

ELECTRICAL

Standard: UL IEC
Rated Voltage: 300V 250V
Rated Current: 8A 8A
Contact Resistance: 20mΩ
Insulation Resistance: 500MΩ/DC500V
Withstanding Voltage: AC 2000V for one minute

MECHANICAL


Temp. Range: -40°C ~ +105°C

MATERIAL

Housing: PBT, UL94V-0
Pin Header: Copper Alloy, Sn Plated



DIMENSIONS

Pitch: 3.5mm
Poles: 2P-24P

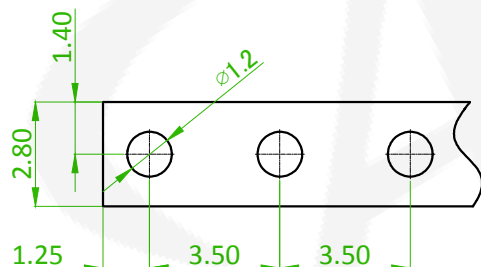

P.C.B. LAYOUT

ORDER INFORMATION

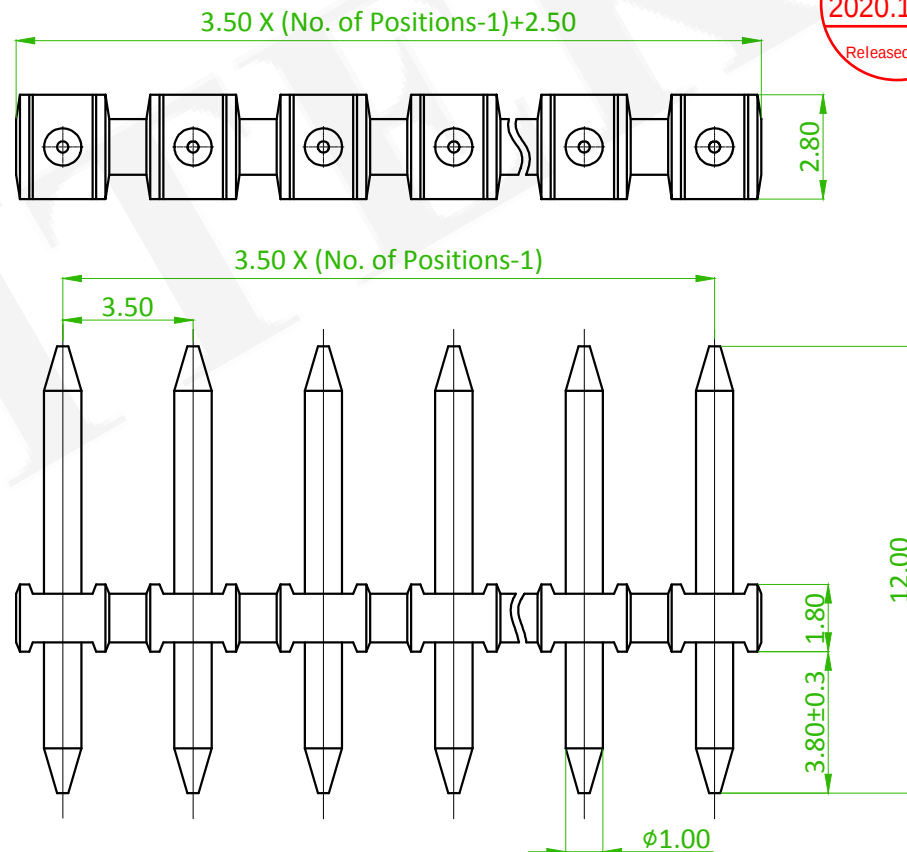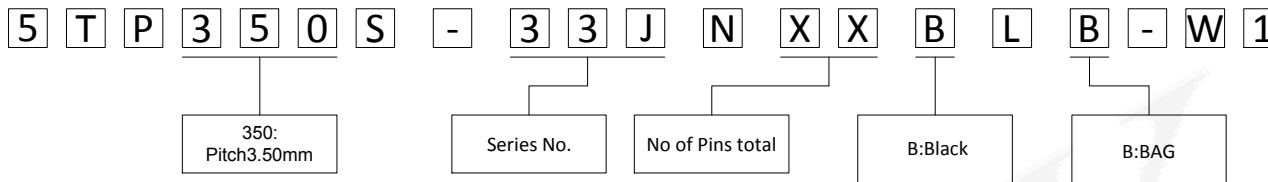

linear dimension (Tolerances Standard GB/T 14486-2008)



variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
Ax2	ECN NO:201129 Revise the PART NO.	Alice	2020/12/16
Bx1	ECN NO:200718 Revise the Dimension	Alice	2020/09/09



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	Terminal Block				頁數 Page	1/1
品號 PART NO.	△ 5TP350S-33JNXXBLB-W1				繪圖 DRAWN	Mia 2017/02/14
圖號 DRAWING NO.	GN116-MC279		版本 REV.	C	核對 CHECKED	Jonny 2017/02/14
客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Aaron 2017/02/14
公差 TOLERANCE			單位 UNIT	mm	THIRD ANGLE PROJECTION	