ORDER INFORMATION

5 T P 3 8 1 N - 5 K B N X X E L B - 0 1

- 5KB: Series No.
- NXX: No. of Poles (02~24)
- E: E:Green
- B: B:Bag

Electrical

	UL	IEC
Standard:	UL	IEC
Rated Voltage:	300V	250V
Rated Current:	8A	7A
Wire Range:	28-16AWG	1.5mm²

Contact Resistance: 20mΩ
Withstanding Voltage: AC 2000V for one min
Insulation Resistance: 500MΩ / DC 500V

Mechanical

Strip Length: 6~7mm
Temp. Range: -40°C ~ +105°C

Material

Housing: Nylon 66, UL94V-0
Scerw:M2.0,Steel,Zn Plated
Clamp: Copper Alloy, Ni Plated
Cage: Copper Alloy, Ni Plated

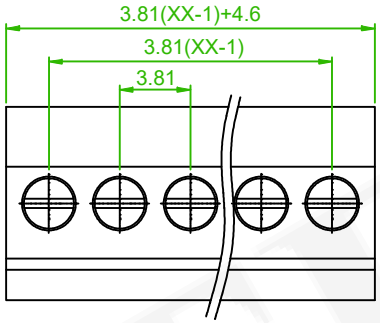

AMTEK糧德
2020.09.16
Released DCC

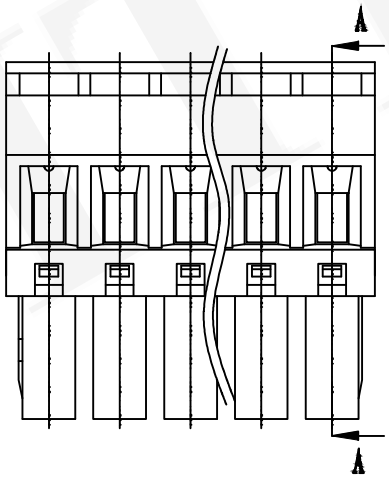

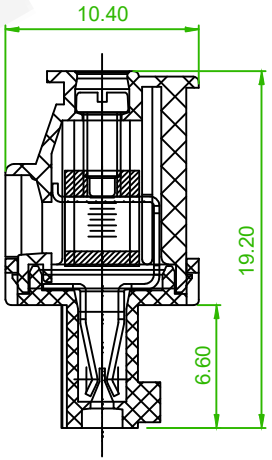

SECTION:A–A

B

linear dimension(Tolerances Standard GB/T 14486–2008)								—	▱	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
B x1	ECN NO:200718 Revise the Dimension	Alice	2020/09/09

糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	3.81mm Terminal Block			頁數 Page	1/1
品號 PART NO.	5TP381N-5KBNXXELB-01			繪圖 DRAWN	Roy 2018/11/16
圖號 DRAWING NO.	GN011-RR955	版本 REV.	B	核對 CHECKED	Josh 2018/11/16
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/11/16
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION	