ORDER INFORMATION

5	T	P	3	8	1	N	-	5	K	D	N	X	X	E	L	B	-	0	1

- Series No.
- No. of Poles total(02~24)
- E:Green
- B:Bag

AMTEK糧德
2023.05.26
Released DCC

Electrical

	UL	IEC
Standard:	UL	IEC
Rated Voltage:	300V	250V
Rated Current:	8A	13.5A
Wire Range:	28-16AWG	1.5mm²

Contact Resistance: 20mΩ
Withstanding Voltage: AC 2000V for one min
Insulation Resistance: 500MΩ / DC 1000V

Mechanical

Strip Length: 7~8mm
Temp. Range: -40°C ~ +105°C

Material

Housing: Nylon 66, UL94V-0
Clamp: Phosphor Bronze, Ni Plated

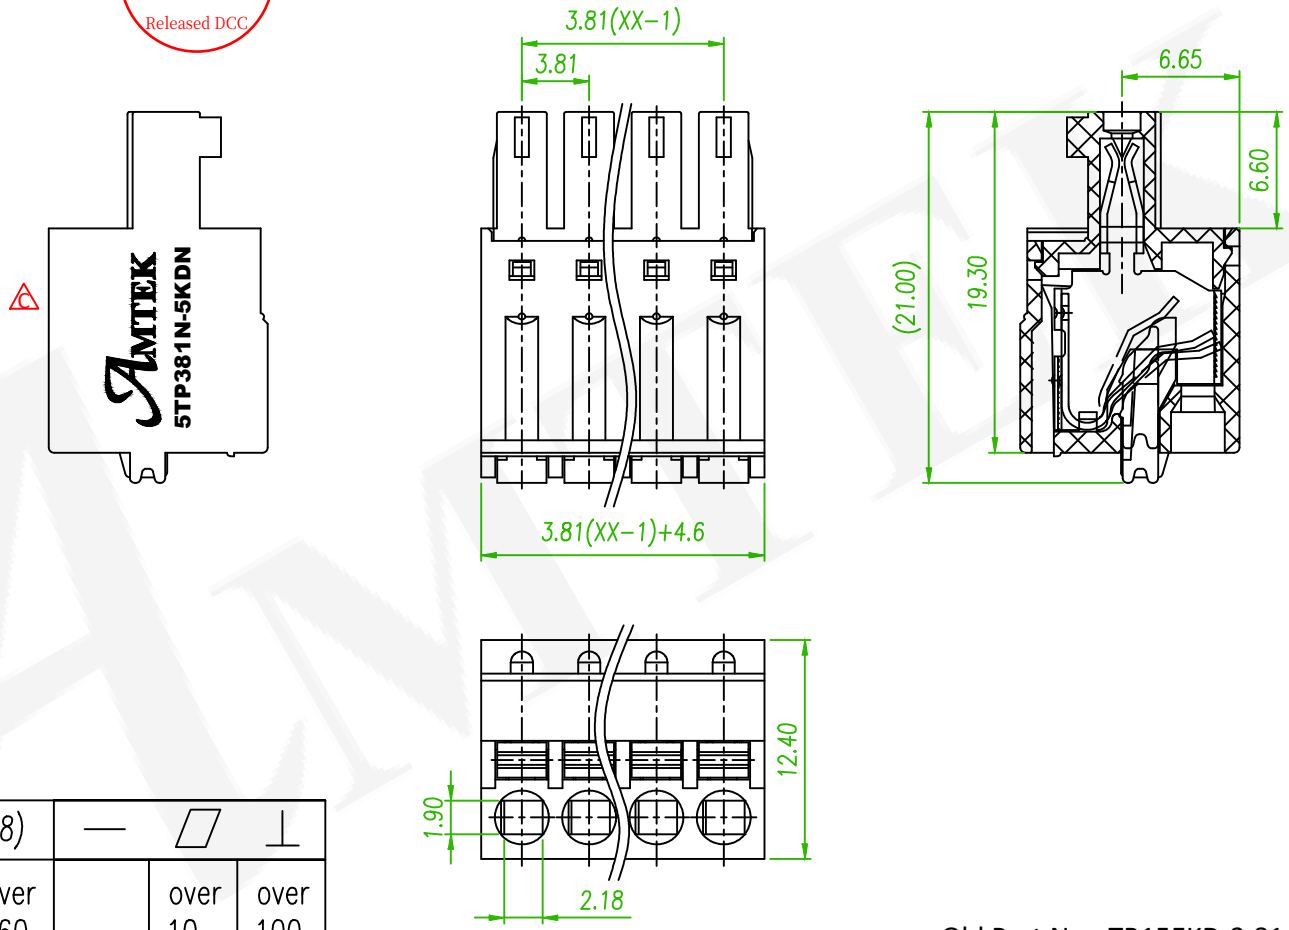

B

linear dimension(Tolerances Standard GB/T 14486-2008)								—	▱	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
C x1	Add the Logo	Alice	2023/05/25
B x1	ECN NO:200718 Revise the Dimension	Alice	2020/09/10

Old Part No. :TB15EKD-3.81-XXP-14-00A-L

糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	3.81mm Terminal Block			頁數 Page	1/1
品號 PART NO.	5TP381N-5KDNXXELB-01			繪圖 DRAWN	Jeff 2012/11/06
圖號 DRAWING NO.	GN011-RR896	版本 REV.	C	核對 CHECKED	Roy 2012/11/06
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2012/11/06
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION	