


Electrical

Standard: UL IEC
Rated Voltage: 300V 250V
Rated Current: 8A 7A
Contact Resistance: 20mΩ
Withstanding Voltage: AC 2000V for one min
Insulation Resistance: 5000MΩ

ORDER INFORMATION




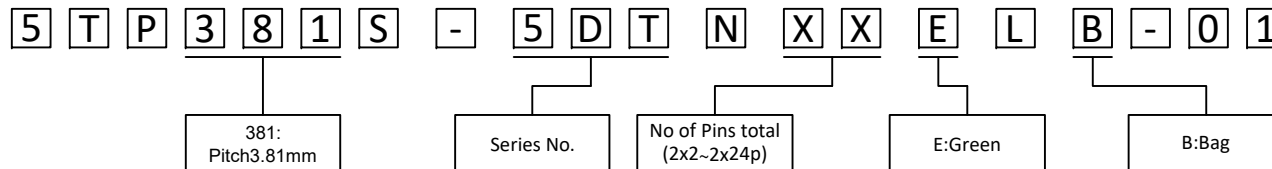


Mechanical

Temp. Range: -40°C ~ +105°C

Material

Housing: Nylon 66, UL94V-0
Pin Header: Brass, Tin Plated

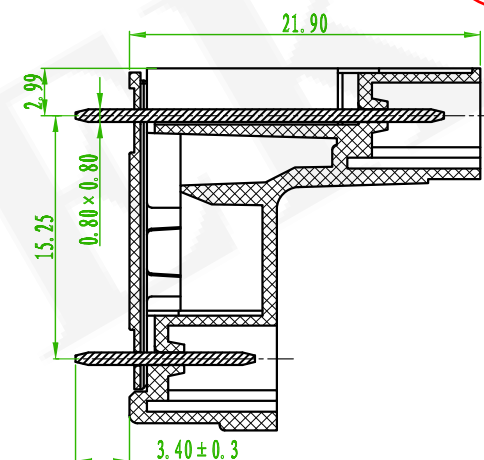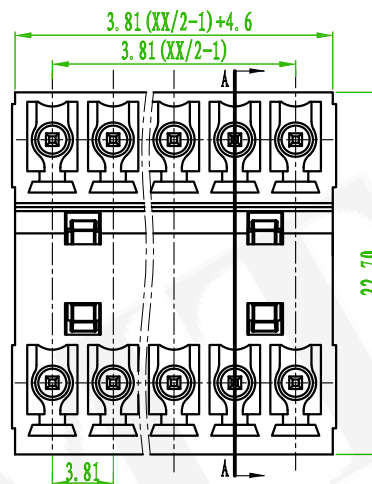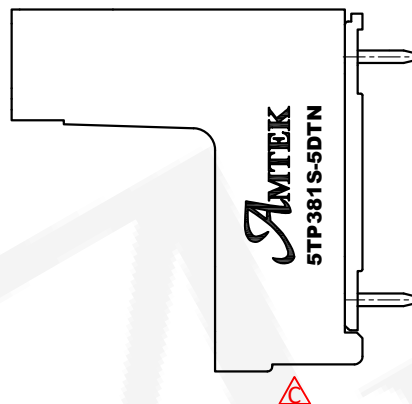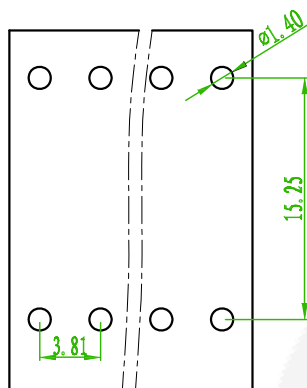

SECTION A-A



linear dimension (Tolerances Standard GB/T 14486-2008)



variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
Ax1	Add the Amtek LOGO	Benson	2023/01/16
Bx1	ECN NO:200718 Revise the Tolerance	Alice	2020/09/10

Old Part No. :TB15EVT-3.81-XXP-1X-00A-L

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	3.81mm Terminal Block			頁數 Page	1/1
	品號 PART NO.	5TP381S-5DTNXXELB-01			繪圖 DRAWN	Roy 2018/11/30
	圖號 DRAWING NO.	GN011-R1001	版本 REV.	C	核對 CHECKED	Josh 2018/11/30
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/11/30
	公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION	