

ELECTRICAL

Standard: UL IEC
 Rated Voltage: 300V 250V
 Rated Current: 15A 10A
 Withstanding Voltage: AC 1600V for one minute
 Wire range: 28~12 AWG 0.5~2.5mm²



MECHANICAL

Temp. Range: -40°C~+105°C
 Torque(Max): 0.5Nm
 Strip Length: 7-8mm

MATERIAL

Housing: Nylon66, UL94V-0
 Contact Pin: Copper alloy
 Screws: M3

ORDER INFORMATION

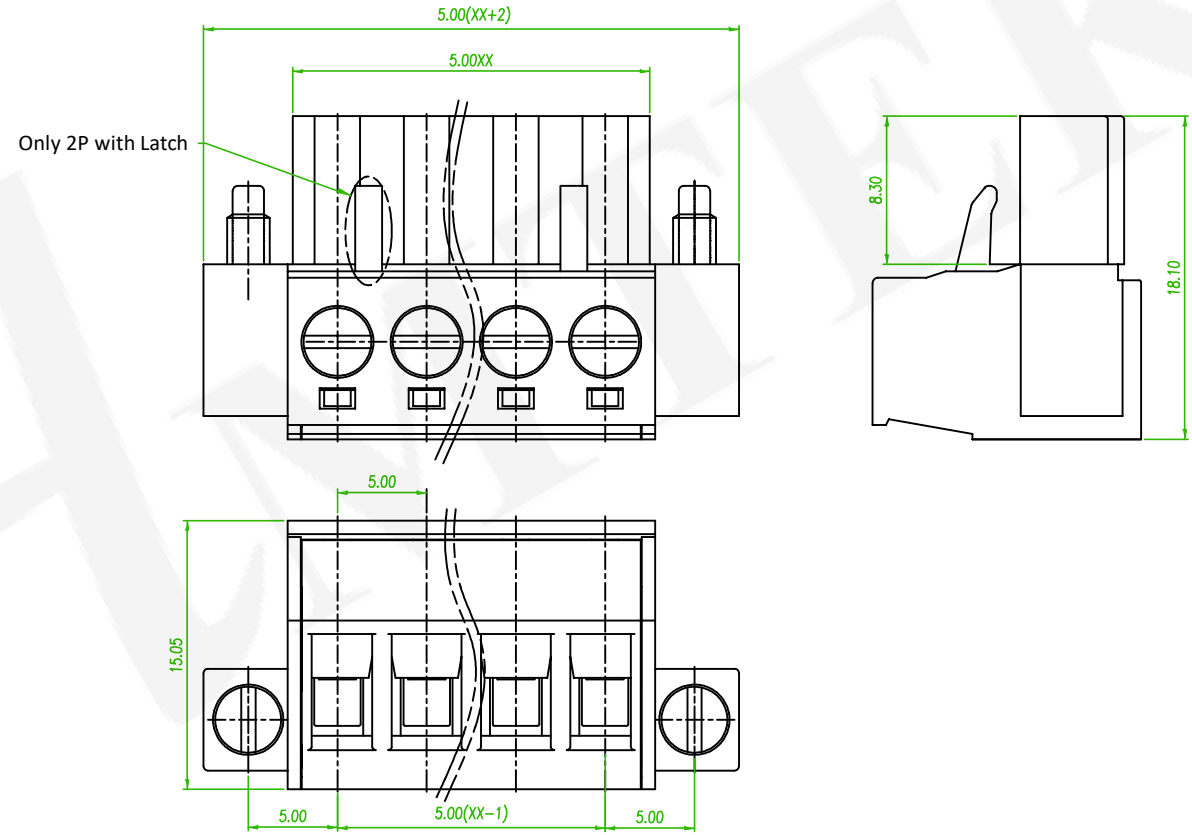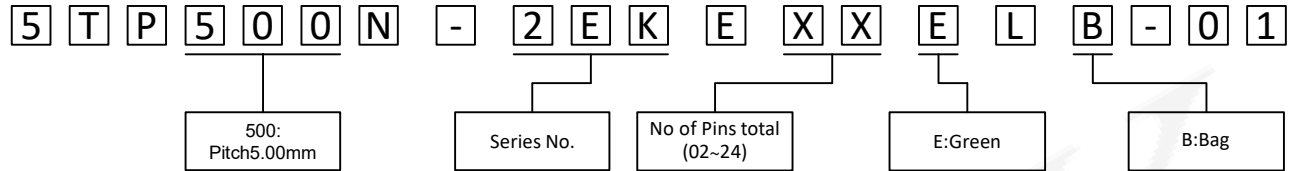

linear dimension (Tolerances Standard GB/T 14486-2008)									
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	to 10	over 10 to 100	over 100 to 100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.60	0.10	0.30	0.60

糧德精密有限公司
 Amtek Technology Co., Ltd.
 TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名 TITLE	Terminal Block				頁數 Page	1/1
品號 PART NO.	5TP500N-2EKEXXELB-01			繪圖 DRAWN	David 2020/07/08	
圖號 DRAWING NO.	GN011-DW229	版本 REV.	A	核對 CHECKED	Josh 2020/07/08	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2020/07/08	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
------	------------------------	---------	------