

ELECTRICAL

Standard: UL IEC
 Rated Voltage: 300V 450V
 Rated Current: 15A 10A
 Contact Resistance: 20mΩ
 Withstanding Voltage: AC 2000V for one min
 Insulation Resistance: 500MΩ
 Wire range: 28-12AWG 2.5mm²





MECHANICAL

Temp. Range: -40°C ~ +105°C
 Torque: 0.4Nm
 Steip length: 7-8mm

MATERIAL

Housing: PA66, UL94V-0
 Screws: M2.5 Steel, Zn plated
 Clamp: Copper alloy, Ni plated
 Cage: Copper alloy, Ni plated
 Slide block: Steel, Zn plated

ORDER INFORMATION

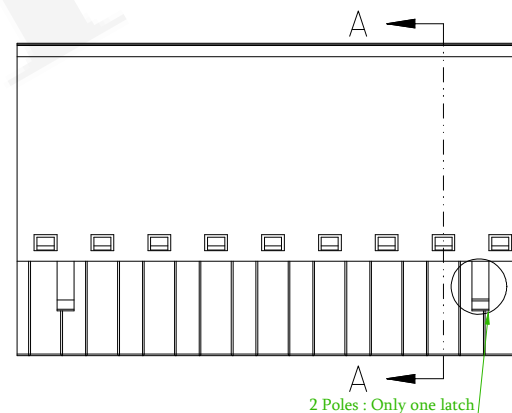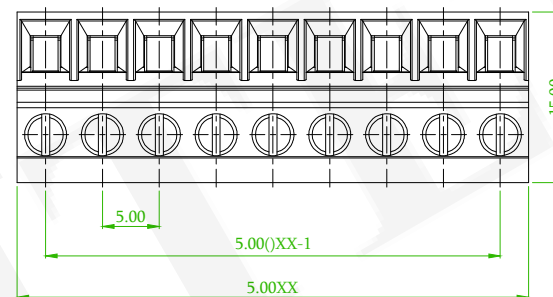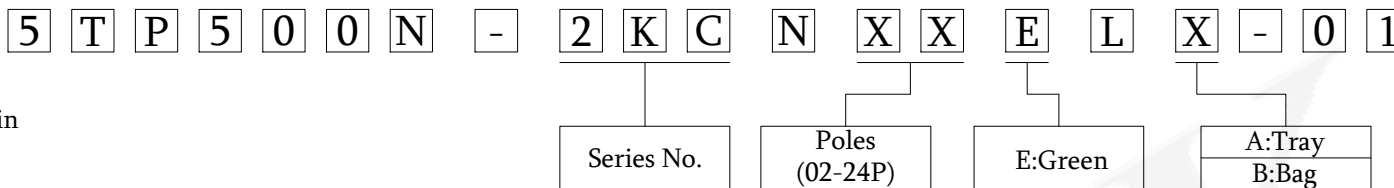

SECTION A-A



linear dimension (Tolerances Standard GB/T 14486-2008)



variable range	to	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	to 10	over 10 to 100	to 100	
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60



ECN NO:200718 Revise the Tolerance

Alice 2020/09/15

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
------	------------------------	---------	------



糧德精密有限公司
 Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名 TITLE	5.0mm Terminal Block				頁數 Page	1/1
品號 PART NO.	5TP500N-2KCNXXELX-01			繪圖 DRAWN	Eric 2018/12/18	
圖號 DRAWING NO.	GN011-EA319	版本 REV.	B	核對 CHECKED	Josh 2018/12/18	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/12/18	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		