

ELECTRICAL

Standard: UL IEC
 Rated Voltage: 300V 320V
 Rated Current: 10A 10A
 Contact Resistance: 20mΩ
 Withstanding Voltage: AC 2000V for one min
 Insulation Resistance: 500MΩ
 Wire range: 28-14AWG 2.5mm²

MECHANICAL

Temp. Range: -40°C ~ +105°C
 Steip length: 7-8mm

MATERIAL

Housing: PA66, UL94V-0
 Clamp: Copper alloy, Sn plated
 Shrapnel: Stainless steel

ORDER INFORMATION

5 T P 5 0 0 N - 2 K D E X X E L X - 0 1

Series No.

Poles
(02-24P)




E:Green

A:Tray
B:Bag

AMTEK 糧德

2020.09.30

Released DCC

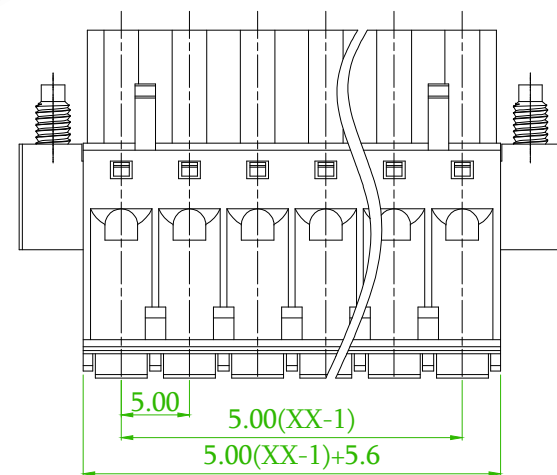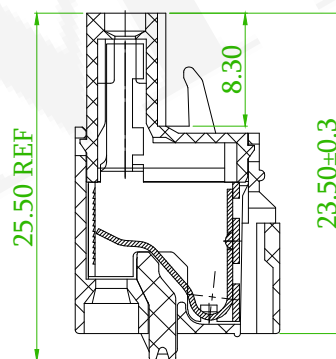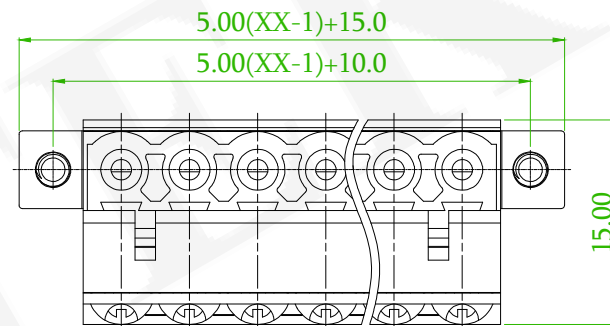

linear dimension (Tolerances Standard GB/T 14486-2008)

— □ ⊥

<i>variable range</i>	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
<i>tolerance</i>	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

Bx1

ECN NO:200718 Revise the Tolerance

Alice

2020/09/15

REV.

ECN NO. OR DESCRIPTION

REVISED

DATE



糧德精密有限公司
 Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名 TITLE	5.0mm Terminal Block				頁數 Page	1/1
品號 PART NO.	5TP500N-2KDEXXELX-01				繪圖 DRAWN	Eric 2018/12/18
圖號 DRAWING NO.	GN011-EA324		版本 REV.	B	核對 CHECKED	Josh 2018/12/18
客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Jason 2018/12/18
公差 TOLERANCE			單位 UNIT	mm	THIRD ANGLE PROJECTION	