

ELECTRICAL

Standard: UL IEC
 Rated Voltage: 300V 320V
 Rated Current: 10A 10A
 Contact Resistance: 20mΩ
 Withstanding Voltage: AC 2000V for one min
 Insulation Resistance: 500MΩ
 Wire range: 28-14AWG 2.5mm²

MECHANICAL

Temp. Range: -40°C ~ +105°C
 Steip length: 7-8mm

MATERIAL




Housing: PA66, UL94V-0
 Clamp: Copper alloy, Sn plated
 Shrapnel: Stainless steel

ORDER INFORMATION

5 T P 5 0 0 N - 2 K D F X X X L X - 0 1

Series No. Poles (02-24P) E:Green A:Tray B:Bag

AMTEK 糧德
 2023.11.02
 Released DCC

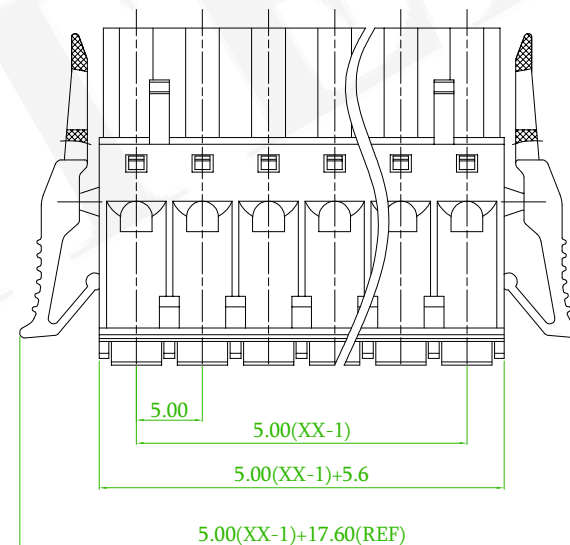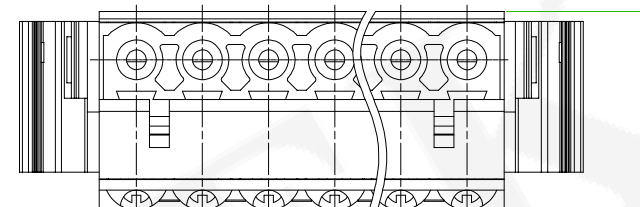

△

linear dimension(Tolerances Standard GB/T 14486-2008)								—	∕	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	to 10	over 10 to 100	over 100 to	
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60
△	ECN NO:230714 Revise the PART NO.							Gaby	2023/09/21	
△x2	ECN NO:201215 Revise the PART NO.							Alice	2020/12/30	
△x1	ECN NO:200718 Revise the Tolerance							Alice	2020/09/15	
REV.	ECN NO. OR DESCRIPTION							REVISED	DATE	

糧德精密有限公司
 Amtek Technology Co., Ltd.
 TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名 TITLE	5.08mm Terminal Block				頁數 Page	1/1
品號 PART NO.	△ 5TP500N-2KDFXXXLX-01 △		繪圖 DRAWN	Eric 2018/12/03		
圖號 DRAWING NO.	GN011-EA152	版本 REV.	D	核對 CHECKED	Josh 2018/12/03	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/12/03	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		