

ORDER INFORMATION

ELECTRICAL

Standard: UL IEC
 Rated Voltage: 300V 250V
 Rated Current: 15A 12A
 Withstanding Voltage: AC 1600V for one minute
 Wire Range: 28~12AWG

MACHANICAL

Temp.Range: -40°C~+105°C
 Torque: 0.5N.m
 Steip Length: 7-8mm

DIMENSIONS

Pitch: 5.08mm
 Poles: 02~24
 Screws: M3

MATERIAL

Insulation: PA66, UL94V-0
 Contactor: Copper alloy, Ni plated

5 T P 5 0 8 N - 2 K A E X X E L B - 0 1




508:
Pitch5.08mm

Series No.

No of Poles
(02~24P)

E:Green

B:Bag

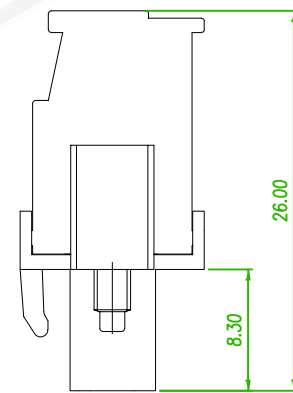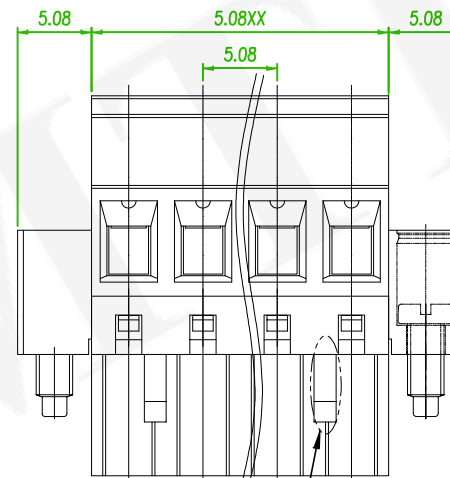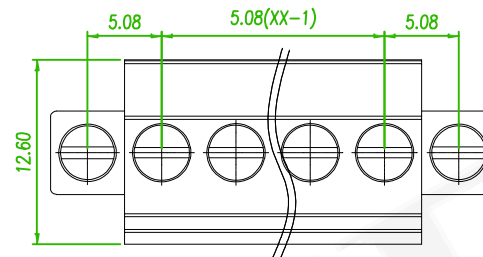

Only 2P with Latch

linear dimension(Tolerances Standard GB/T 14486-2008)

variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to 100	
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

 糧德精密有限公司 Amtek Technology Co., Ltd. TEL: 886-2-2260-6878 FAX: 886-2-2260-8030	品名 TITLE	Terminal Block			頁數 Page	1/1
	品號 PART NO.	5TP508N-2KAEXXELB-01			繪圖 DRAWN	Benson 2022/06/09
	圖號 DRAWING NO.	GN011-BE022	版本 REV.	A	核對 CHECKED	Josh 2022/06/09
	客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2022/06/09
	公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION	