


# ORDER INFORMATION

## ELECTRICAL

Standard: UL IEC  
 Rated Voltage: 300V 320V  
 Rated Current: 15A 10A  
 Contact Resistance: 20mΩ  
 Insulation Resistance: 500MΩ / DC 500V  
 Withstanding Voltage: AC 2000V for one minute  
 Wire range: 26~14AWG 2.5mm<sup>2</sup>

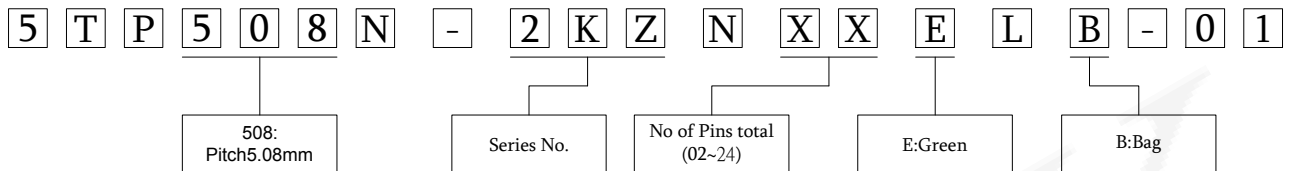


## MECHANICAL

Temp. Range: -40°C~+105°C  
 Torque: 0.5Nm(4.5Lb.in)  
 Steip Length: 7-8mm

## MATERIAL

Housing: PA66, UL94V-0  
 Screws: M3 Steel, Zn plated  
 Copper Cylinder: Brass, Ni plated

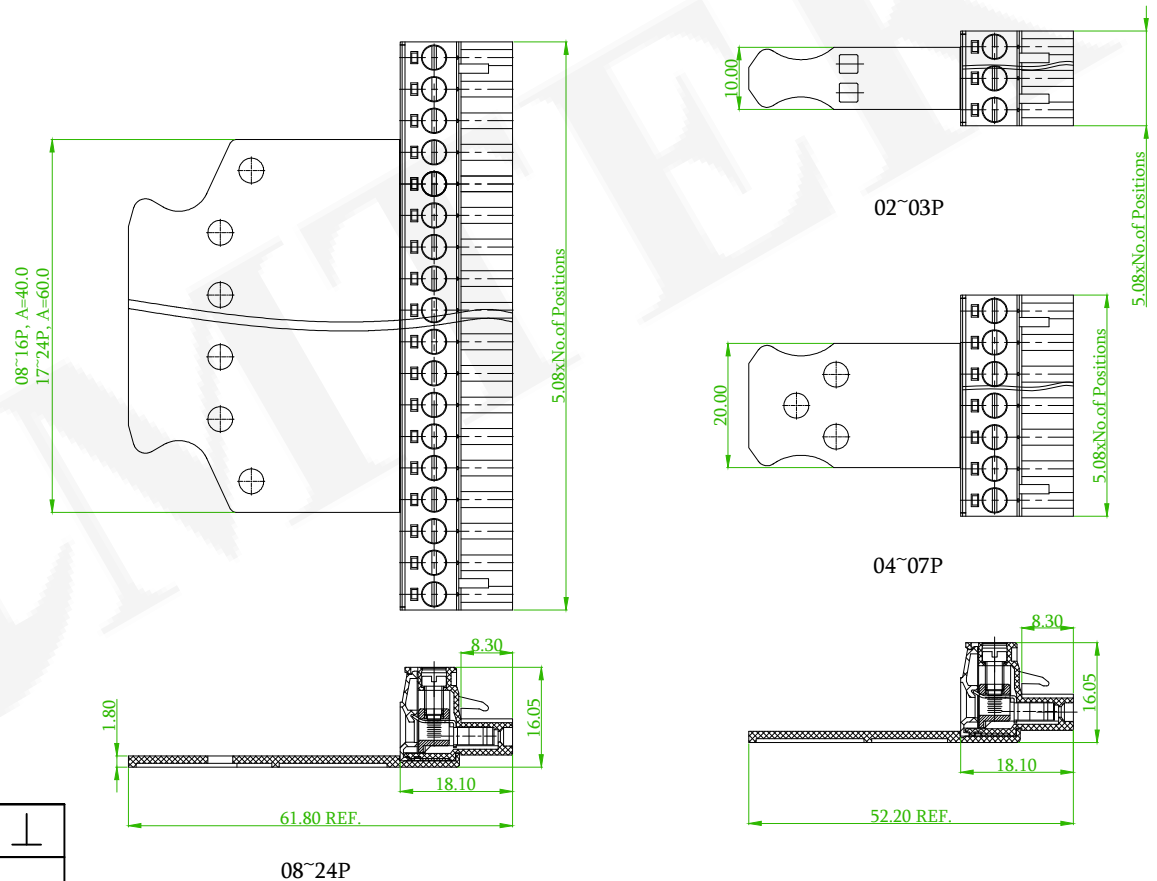

**B** linear dimension (Tolerances Standard GB/T 14486-2008) —  $\square$   $\perp$

variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to 100	
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

<b>B</b> x1	ECN NO:200718 Revise the Tolerance	Alice	2020/09/23
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

**糧德精密有限公司**  
 Amtek Technology Co., Ltd.  
 TEL: 886-2-2260-6878  
 FAX: 886-2-2260-8030

品名 TITLE	Terminal Block				頁數 Page	1/1
品號 PART NO.	5TP508N-2KZNXXELB-01			繪圖 DRAWN	Andy 2017/12/22	
圖號 DRAWING NO.	GW011-AA367	版本 REV.	B	核對 CHECKED	Josh 2017/12/22	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2017/12/22	
公差 TOLERANCE	.X ± 0.38 .XX ± 0.25	X° ± 3°	單位 UNIT	mm	THIRD ANGLE PROJECTION	