

Standard:	UL	IEC
Rated Voltage:	300V	450V
Rated Current:	15A	20A
Contact Resistance:	20mΩ	
Withstanding Voltage:	AC 2000V	
Insulation Resistance:	500MΩ	
Wire range:	28-14AWG 2.5mm ²	

MECHANICAL

Temp. Range: -40°C ~ +105°C
Torque: 0.5Nm
Steip length: 7-8mm



MATERIAL

Housing: PA66, UL94V-0
Screws: M3 steel, Zn plated
Pin header: Brass, Ni plated
Cage: Brass, Ni plated
Nut: Brass

ORDER INFORMATION

in

5	T	P	5	0	8	N	-	2	V	E	E	X	X	X	L	X	-	0	1
								Series No.			Poles (06-24P)			E:Green		A:Tray B:Bag			

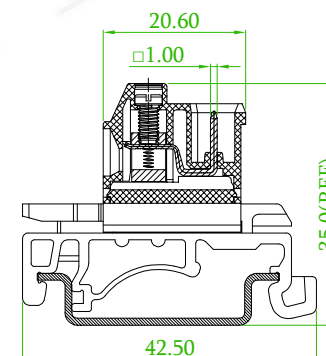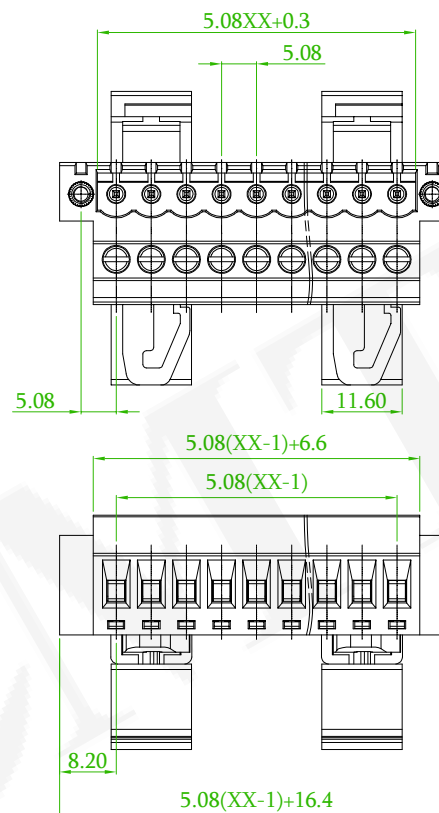

linear dimension(Tolerances Standard GB/T 14486-2008)								—		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

	ECN NO:230714 Revise the PART NO.	Gaby	2023/09/23
 x2	ECN NO:201215 Revise the PART NO.	Alice	2020/12/30
 x1	ECN NO:200718 Revise the Tolerance	Alice	2020/09/23
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	5.08mm Terminal Block				頁數 Page	1/1
品號 PART NO.	⚠ 5TP508N-2VEEXXXLX-01 ⚠			繪圖 DRAWN	Eric 2018/12/07	
圖號 DRAWING NO.	GN011-EA218	版本 REV.	D	核對 CHECKED	Josh 2018/12/07	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/12/07	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		