

ELECTRICAL

Standard: UL IEC
Rated Voltage: 300V 250V
Rated Current: 15A 10A
Withstanding Voltage: AC 1600V for one minute
Temp. Range: -40°C ~ +105°C

MATERIAL

Housing: Nylon66, UL94V-0
Pin header: Brass Tin plated
Nut: M2.5, Brass

ORDER INFORMATION

5 T P 5 0 8 R - 2 E G E X X X L X - 0 1

508:
Pitch 5.08mm

Series No.

No of Pins total
(02~24)


G:Gray	O:Orange
U:Blue	R:Red
B:Black	T:Transparent
E:Green	N:Brown
	W:White

B:Bag




2023.11.02

Released DCC

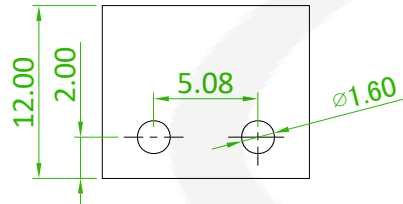


P.C.B. LAYOUT

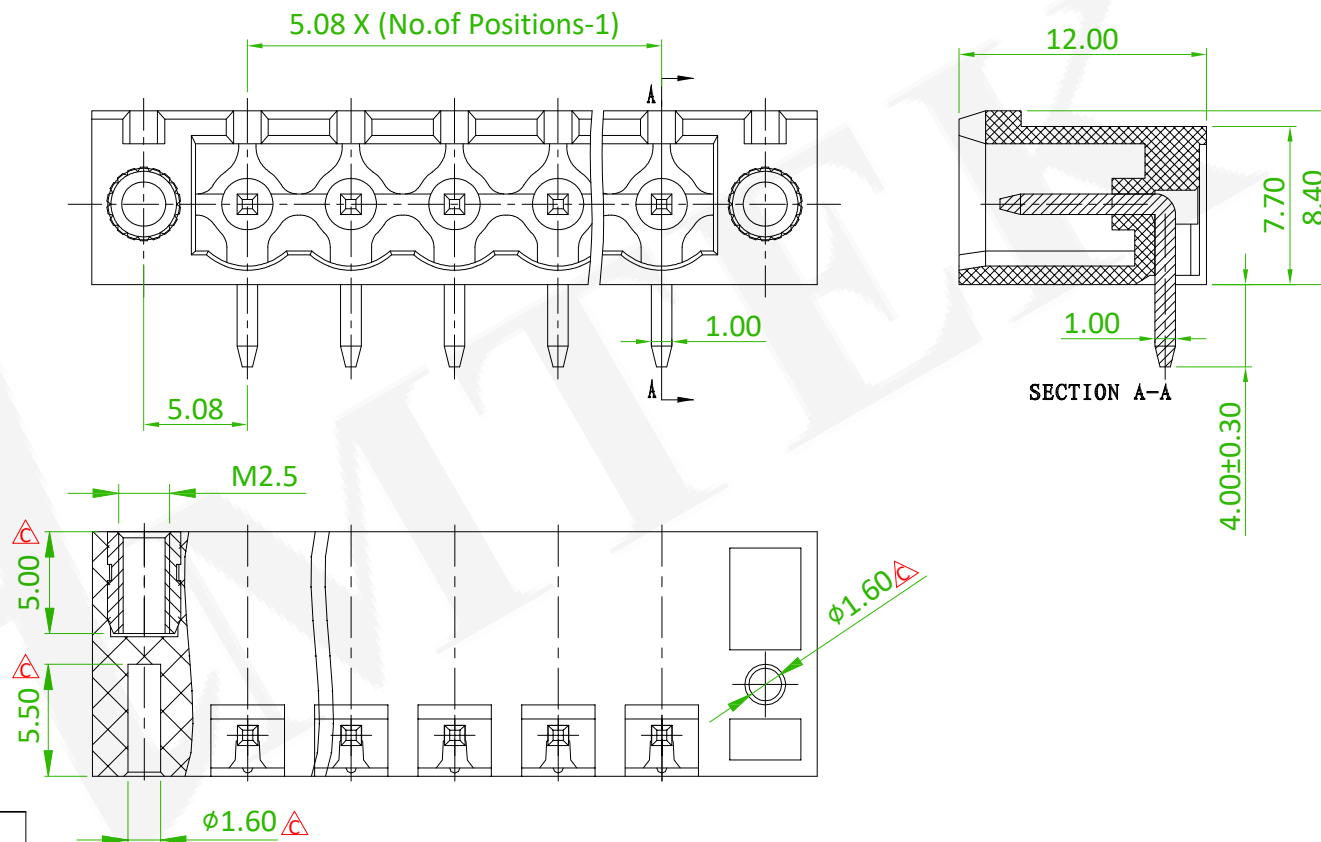

linear dimension(Tolerances Standard GB/T 14486-2008)

<i>variable range</i>		over 6	over 10	over 30	over 60	over 100	over 160		over 10	over 100
	to 6	to 10	to 30	to 60	to 100	to 160	to	to 10	to 100	to
<i>tolerance</i>	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

△	ECN NO.: 230714 Revise the PART NO	Benson	2023/08/29
△x2	ECN NO:201215 Revise the PART NO.	Alice	2020/12/30
△x5	Add the Dimension, Revise the electrical	David	2020/10/21
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



品名 TITLE	Terminal Block				頁數 Page	1/1
品號 PART NO.	△ 5TP508R-2EGEXXXLX-01 △				繪圖 DRAWN	Mia 2017/04/27
圖號 DRAWING NO.	GN011-MC386				核對 CHECKED	Jonny 2017/04/27
客戶品號 CUSTOMER P/N					承認 APPROVED	Aaron 2017/04/27
公差 TOLERANCE					單位 UNIT	mm
				版本 REV.	E	
				比例 SCALE	None	
				THIRD ANGLE PROJECTION		

Old Part No. :TB2ERM-5.08-XXP-1X-00A-L