


Electrical

Standard: UL IEC
Rated Voltage: 300V 450V
Rated Current: 15A 17.5A
Contact Resistance: 20mΩ
Insulation Resistance: 500MΩ / DC 500V
Withstanding Voltage: AC 2000V for one minute

ORDER INFORMATION

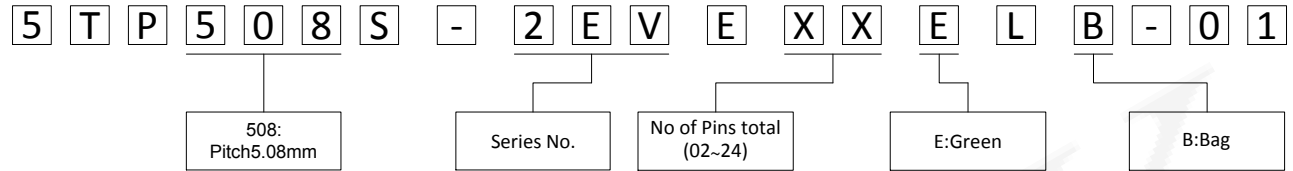

Mechanical


Temp.Range:-40°C~+105°C
MAX Soldering:+250°C, for 5 Sec

Dimensions


Pitch: 5.08mm
Poles:2-24P

Material



Housing: Nylon66, UL94V-0
Pin header:Brass,Tin plated
Nut:Brass

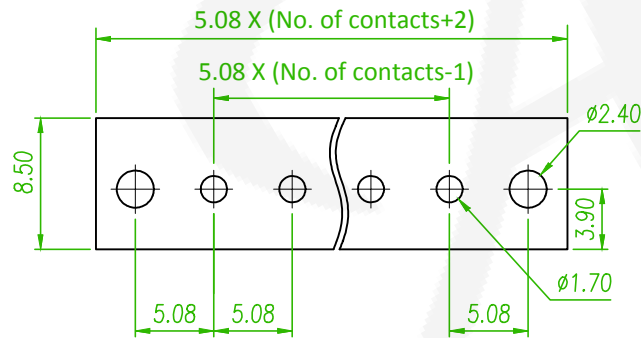

P.C.B. LAYOUT

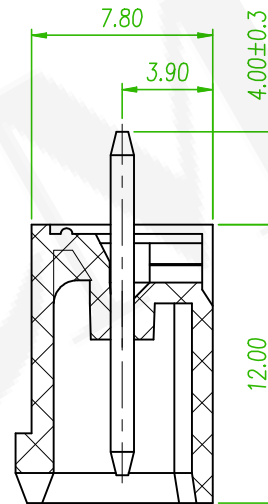

SECTION:A-A

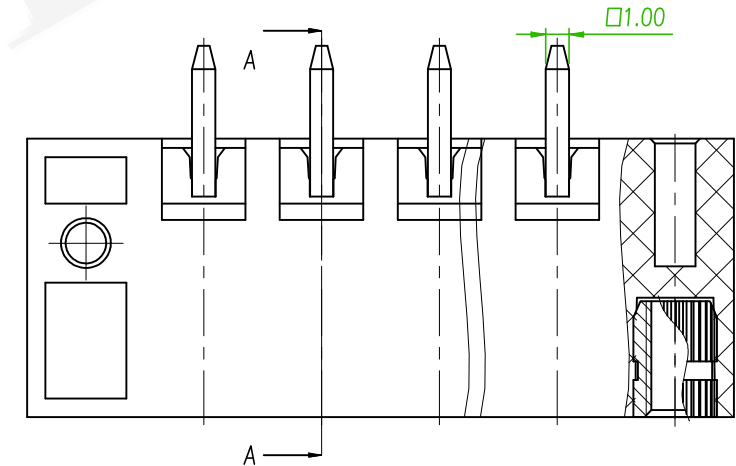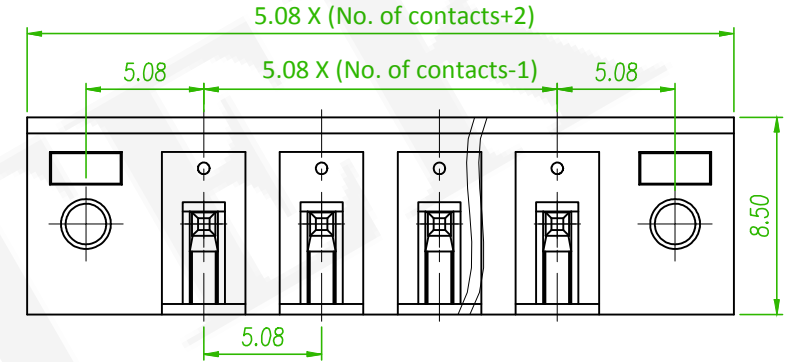

Old Part No. :TB2EVM-5.08

linear dimension(Tolerances Standard GB/T 14486-2008)										—	□	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to 10			
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60		

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
1	ECN NO.:200718 Revise the Tolerance	Alice	2020/09/24


糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	Terminal Block				頁數 Page	1/1
品號 PART NO.	5TP508S-2EVEXXELB-01				繪圖 DRAWN	Mia 2016/08/25
圖號 DRAWING NO.	GN011-AL333	版本 REV.	B	核對 CHECKED	Jonny 2016/08/25	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/08/25	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		