


Standard:	UL	IEC
Rated Voltage:	300V	450V
Rated Current:	15A	17.5A
Contact Resistance:	20mΩ	

ORDER INFORMATION

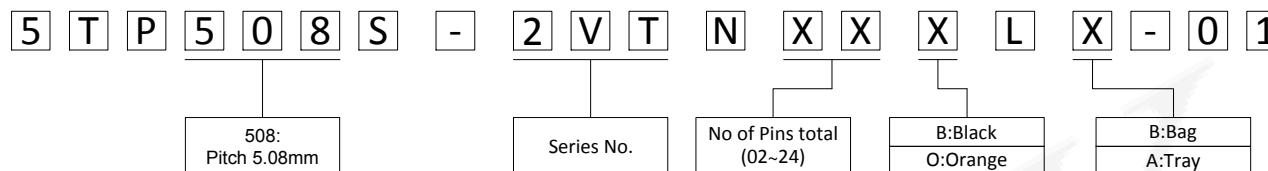

Note:
Bag for 2x02p,2x03p

Mechanical

Temp. Range: -40°C ~ +105°C
Max Soldering: +250°C for 5 Sec




Dimensions

Pitch:5.08mm

Poles:2-24P

Material

Housing:PA66, UL94V-0
Clamp:Brass,Tin Plated

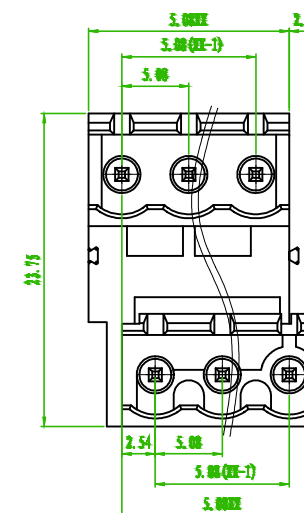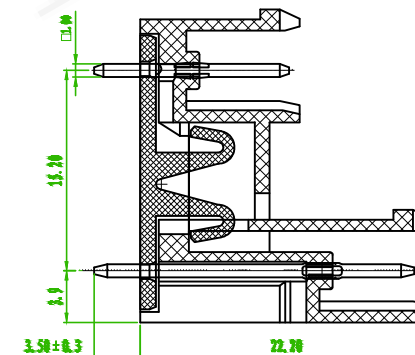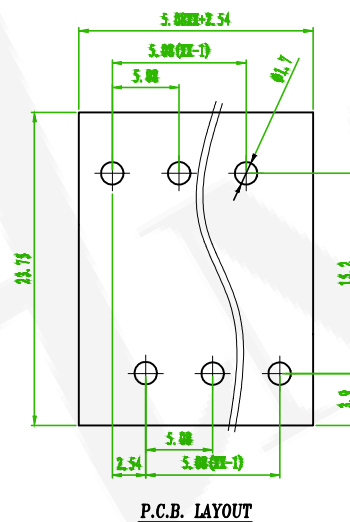

linear dimension(Tolerances Standard GB/T 14486-2008)								—		
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

 x1	ECN NO:200718 Revise the Tolerance	Alice	2020/09/24
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	Terminal Block				頁數 Page	1/1
品號 PART NO.	5TP508S-2VTNXXXLX-01			繪圖 DRAWN	Roy 2016/06/22	
圖號 DRAWING NO.	GN011-AL332	版本 REV.	B	核對 CHECKED	Sabrina 2016/06/22	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2016/06/22	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION	