

ELECTRICAL

Standard: UL IEC
Rated Voltage: 300V 250V
Rated Current: 8A 10A
Contact Resistance: 20mΩ
Withstanding Voltage: AC 2000V for one min
Insulation Resistance: 500MΩ

MECHANICAL

Temp. Range: -40°C ~ +105°C

MATERIAL

Housing: PA66, UL94V-0
Pin header: Brass, Tin plated

ORDER INFORMATION

5 T P 5 0 8 S - 5 E C N X X E L X - 0 1

Series No.

Poles
(02-24P)

E:Green


A:Tray
B:Bag






AMTEK 耀德

2020.10.15

Released DCC

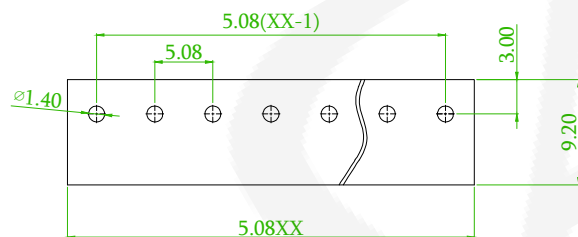

P.C.B. LAYOUT

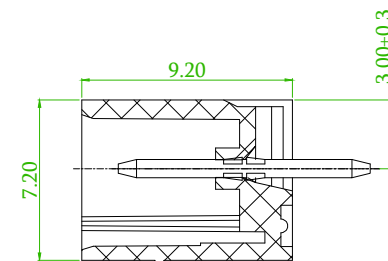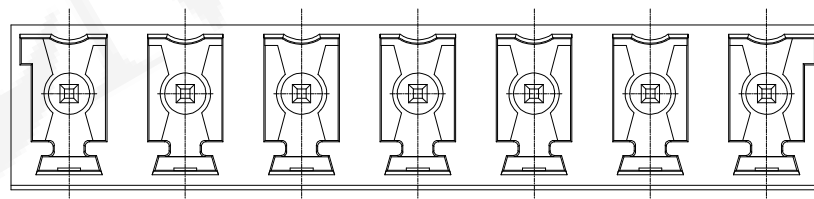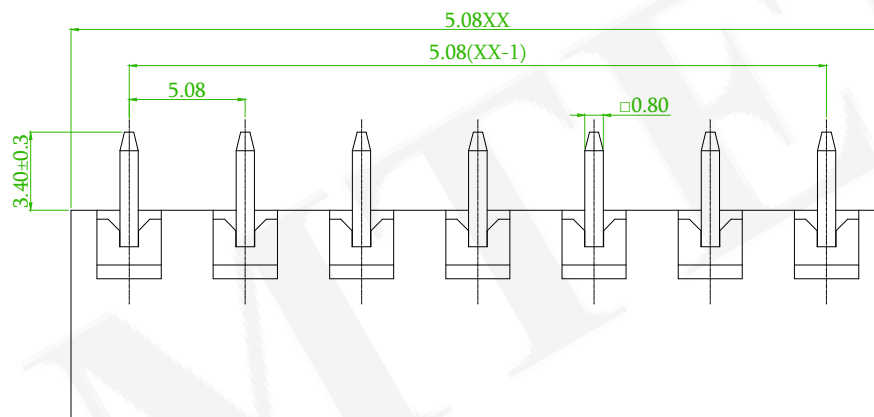

linear dimension (Tolerances Standard GB/T 14486-2008)



variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60



ECN NO:200718 Revise the Tolerance

Alice

2020/09/24

REV.

ECN NO. OR DESCRIPTION

REVISED

DATE



耀德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名

TITLE

5.08mm Terminal Block

頁數

Page

1/1

品號

PART NO.

5TP508S-5ECNXXELX-01

繪圖

DRAWN

Eric

2018/11/29

圖號

DRAWING NO.

GN011-EA138

版本

REV.

B

核對

CHECKED

Josh

2018/11/29

客戶品號

CUSTOMER P/N

比例

SCALE

None

承認

APPROVED

Jason

2018/11/29

公差

TOLERANCE

單位

UNIT

mm

THIRD

ANGLE

PROJECTION

