

ELECTRICAL

Standard: UL IEC
Rated Voltage: 300V 450V
Rated Current: 15A 17.5A
Contact Resistance: 20mΩ
Withstanding Voltage: AC 2000V for one min
Insulation Resistance: 500MΩ
Wire range: 28-14AWG 1.5mm²

MECHANICAL

Temp. Range: -40°C ~ +105°C
Torque: 0.5Nm
Steip length: 7-8mm

MATERIAL

Housing: PA66, UL94V-0
Screws: M3 Steel, Zn plated
Clamp: Phosphor bronze, Ni plated
Cage: Brass, Ni plated
Fixing screws: M2.5 Steel, Zn plated

ORDER INFORMATION





5 T P 7 5 0 N - 2 K B E X X E L X - 0 1

Series No.

Poles
(02-24P)

E:Green

A:Tray
B:Bag

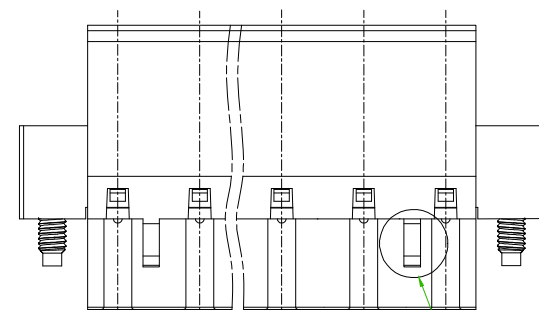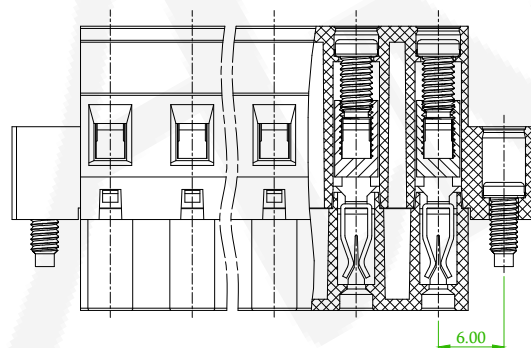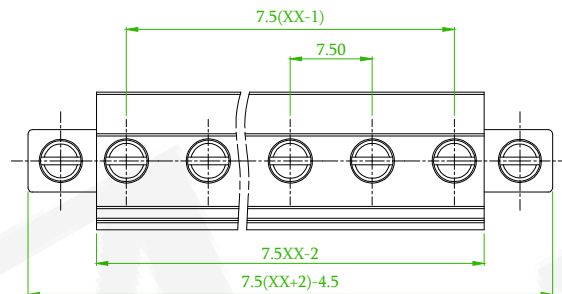

2 Poles : Only one latch



linear dimension(Tolerances Standard GB/T 14486-2008)



<i>variable range</i>	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to 10	
<i>tolerance</i>	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60



ECN NO:200718 Revise the Tolerance

Alice

2020/09/25

REV.

ECN NO. OR DESCRIPTION

REVISED

DATE



糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名
TITLE

7.5mm Terminal Block

頁數
Page

1/1

品號
PART NO.

5TP750N-2KBEXXELX-01

繪圖
DRAWN

Eric
2018/12/18

圖號
DRAWING NO.

GN011-EA317

版本
REV.

B

核對
CHECKED

Josh
2018/12/18

客戶品號
CUSTOMER P/N

比例
SCALE

None

承認
APPROVED

Jason
2018/12/18

公差
TOLERANCE

單位
UNIT

mm

THIRD
ANGLE
PROJECTION

