


**ELECTRICAL**

Standard: UL IEC  
 Rated Voltage: 300V 450V  
 Rated Current: 10A 20A  
 Contact Resistance: 20mΩ  
 Withstanding Voltage: AC 2000V for one min  
 Insulation Resistance: 500MΩ  
 Wire range: 28-14AWG 2.5mm<sup>2</sup>

**ORDER INFORMATION**

5 T P 7 5 0 N - 2 K D N X X E L X - 0 1



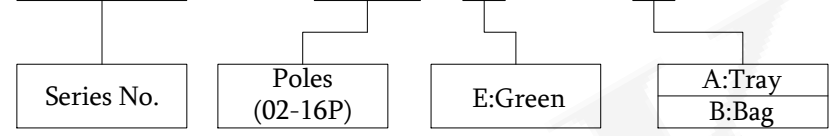


**MECHANICAL**

Temp. Range: -40°C ~ +105°C  
 Steip length: 7-8mm

**MATERIAL**

Housing: PA66, UL94V-0  
 Clamp: Copper alloy, Ni plated  
 Shrapnel: Stainless steel

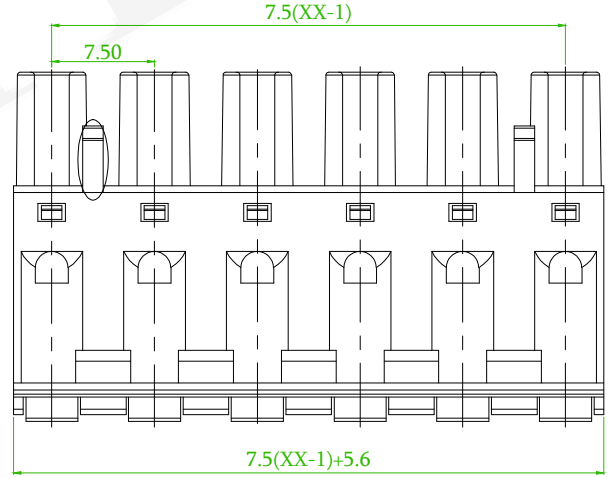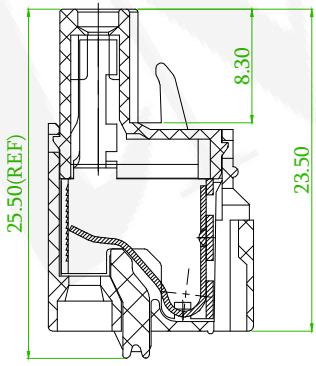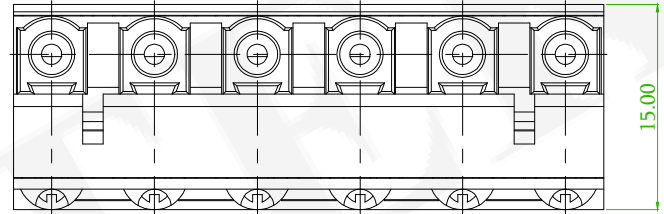

linear dimension(Tolerances Standard GB/T 14486-2008)								—	□	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 250	to 10	over 10 to 100	over 100 to 250
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
△x1	ECN NO.:200718 Revise the Tolerance	Alice	2020/09/25

**糧德精密有限公司**  
 Amtek Technology Co., Ltd.  
 TEL: 886-2-2260-6878  
 FAX: 886-2-2260-8030

品名 TITLE	7.5mm Terminal Block				頁數 Page	1/1
品號 PART NO.	5TP750N-2KDNXXELX-01			繪圖 DRAWN	Eric 2018/12/03	
圖號 DRAWING NO.	GN011-EA154	版本 REV.	B	核對 CHECKED	Josh 2018/12/03	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/12/03	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		