




ORDER INFORMATION

ELECTRICAL


Standard: UL IEC
 Rated Voltage: 300V 400V
 Rated Current: 15A 10A
 Withstanding Voltage: AC 1600V for one min

MATERIAL


Insulation: PA66, UL94V-0
 Contactor: Copper Alloy
 Operating Temperatur : -40°C ~ +105°C

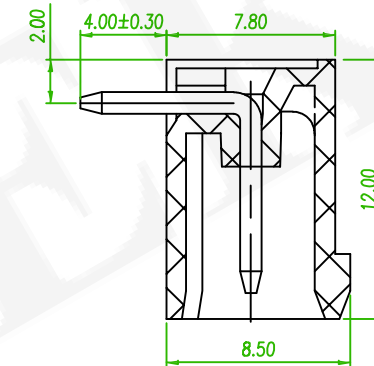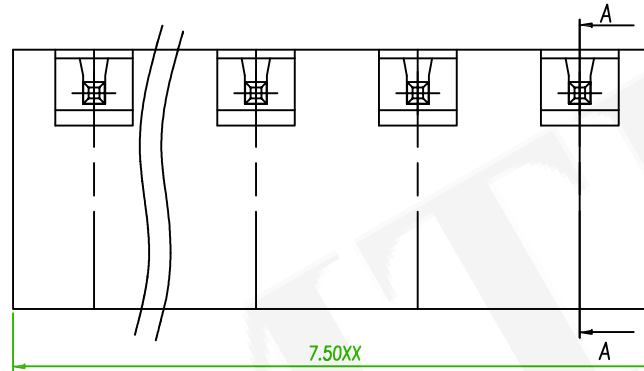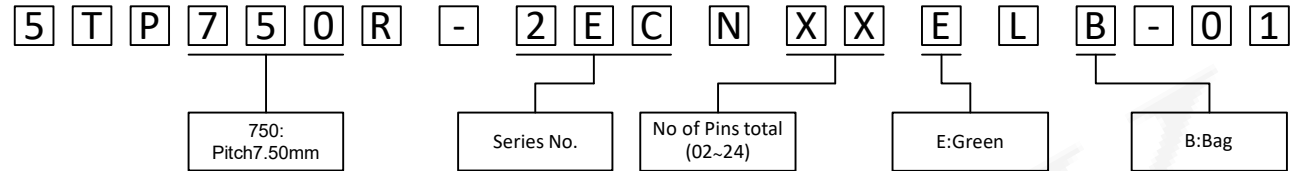

SECTION:A-A

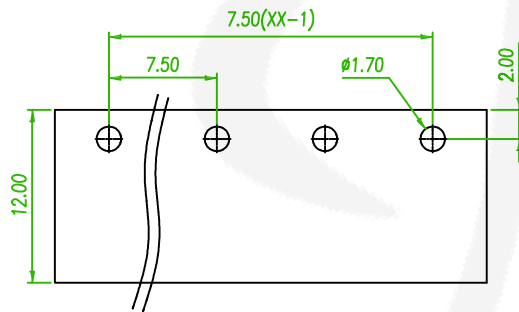

PCB LAYOUT

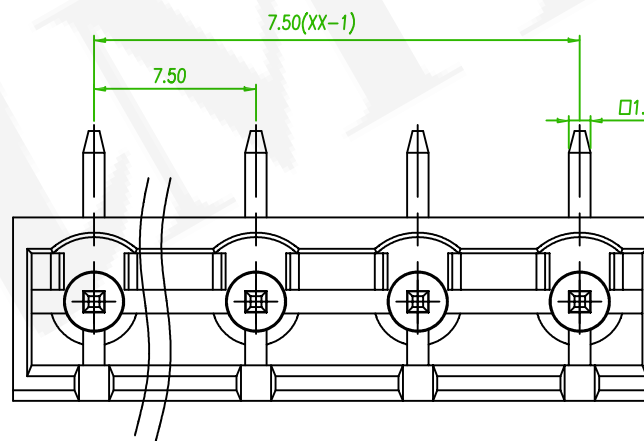

linear dimension(Tolerances Standard GB/T 14486-2008)								—	∇	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

REV.	QEC 200405: Revise the Drawing	David	2020/04/28
	ECN NO. OR DESCRIPTION	REVISED	DATE


 糧德精密有限公司
 Amtek Technology Co., Ltd.
 TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名 TITLE	Terminal Block				頁數 Page	1/1
品號 PART NO.	5TP750R-2ECNXXELB-01			繪圖 DRAWN	Mia 2017/01/17	
圖號 DRAWING NO.	GN011-MC226	版本 REV.	B	核對 CHECKED	Jonny 2017/01/17	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2017/01/17	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		