

Electrical

Standard: UL IEC
Rated Voltage: 300V 320V
Rated Current: 15A 20A
Contact Resistance: 20mΩ
Insulation Resistance: 500MΩ / DC 500V
Dielectric Voltage: AC 2000V for one minute
Temp. Range: -40°C ~ +105°C
Max Soldering: +250°C for 5 Sec

Material

Housing: PA66, UL94V-0
Contact: Brass, Tin plated
Nut: M2.5 Brass

ORDER INFORMATION

5 T P 7 5 0 S - 2 E V E X X E L X - 0 1

Series No.


No. of Poles
(02~24P)

E:Green




B:Bag
A:Tray



AMTEK 耀德
2020.12.25
Released DCC

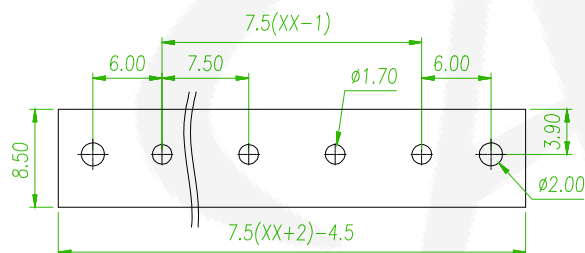

PCB LAYOUT

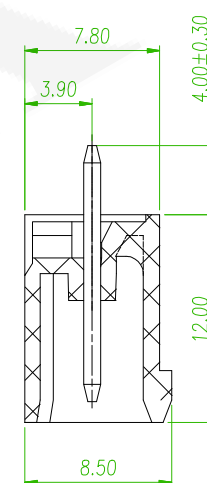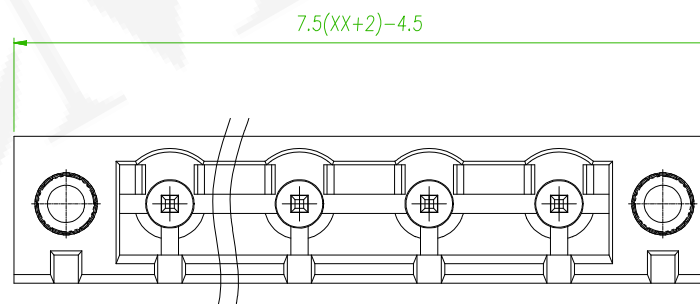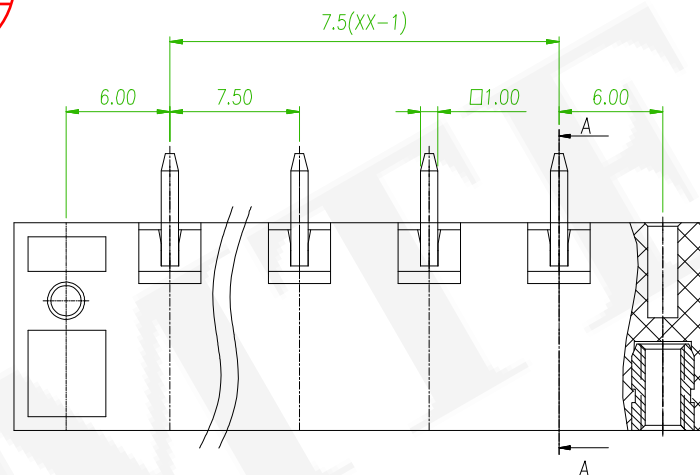

SECTION A-A



linear dimension(Tolerances Standard GB/T 14486-2008)

— □ ⊥

variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 250	to 10	over 10 to 100	over 100 to 250
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60



ECN NO:200718 Revise the Tolerance

Alice

2020/12/25

REV.

ECN NO. OR DESCRIPTION

REVISED

DATE



耀德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	Terminal Block				頁數 Page	1/1
品號 PART NO.	5TP750S-2EVEXXELX-01				繪圖 DRAWN	David 2020/03/19
圖號 DRAWING NO.	GN011-DV922	版本 REV.	B	核對 CHECKED	Josh 2020/03/19	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2020/03/19	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		