

ELECTRICAL

Standard: UL IEC
Rated Voltage: 300V 750V
Rated Current: 15A 20A
Contact Resistance: 20mΩ
Withstanding Voltage: AC 2000V for one min
Insulation Resistance: 500MΩ
Wire range: 28-14AWG 1.5mm²

MECHANICAL

Temp. Range: -40°C ~ +105°C
Torque: 0.5Nm
Steip length: 7-8mm

MATERIAL

Housing: PA66, UL94V-0
Screws: M3 Steel, Zn plated
Clamp: Phosphor bronze, Ni plated
Cage: Brass, Ni plated
Fixing screws: M2.5 Steel, Zn plated

ORDER INFORMATION

5 T P 7 6 2 N - 2 K B E X X E L X - 0 1

Series No.

Poles
(02-24P)

E:Green





A:Tray
B:Bag



AMTEK 糧德

2020.10.15

Released DCC

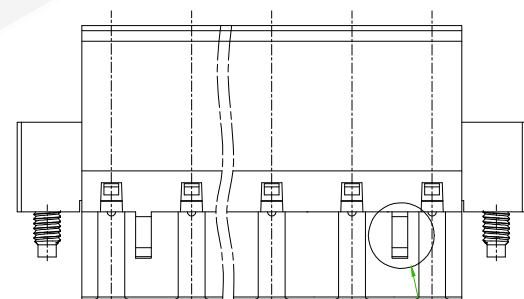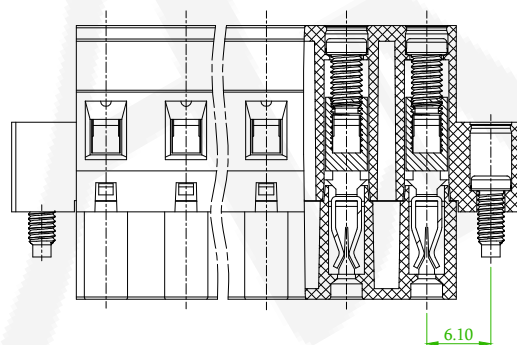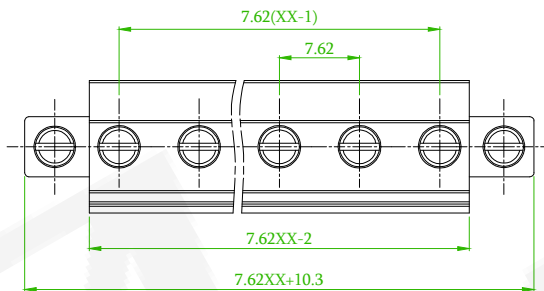

2 Poles : Only one latch



linear dimension(Tolerances Standard GB/T 14486-2008)



<i>variable range</i>	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	to 10	over 10 to 100	over 100 to 100
<i>tolerance</i>	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60



ECN NO:200718 Revise the Tolerance

Alice

2020/09/25

ECN NO. OR DESCRIPTION

REVISED

DATE



糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	7.62mm Terminal Block				頁數 Page	1/1
品號 PART NO.	5TP762N-2KBEXXELX-01				繪圖 DRAWN	Eric 2018/12/18
圖號 DRAWING NO.	GN011-EA318		版本 REV.	B	核對 CHECKED	Josh 2018/12/18
客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Jason 2018/12/18
公差 TOLERANCE			單位 UNIT	mm	THIRD ANGLE PROJECTION	