

ELECTRICAL

Standard: UL IEC
 Rated Voltage: 300V 400V
 Rated Current: 10A 13.5A
 Contact Resistance: 20mΩ
 Withstanding Voltage: AC 2000V for one min
 Insulation Resistance: 500MΩ
 Wire range: 28-14AWG 2.5mm²

MECHANICAL

Temp. Range: -40°C ~ +105°C
 Steip length: 7-8mm

MATERIAL

Housing: PA66, UL94V-0
 Clamp: Copper alloy, Ni plated
 Shrapnel: Stainless steel

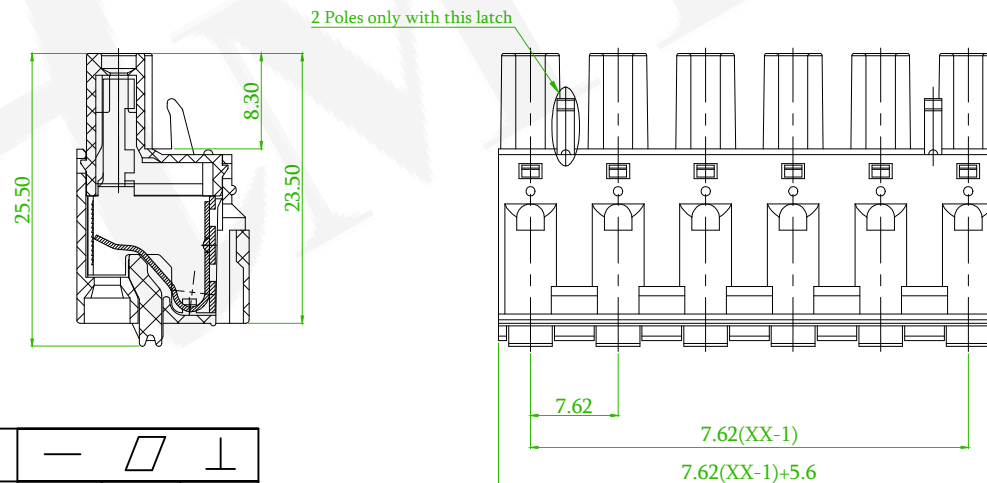
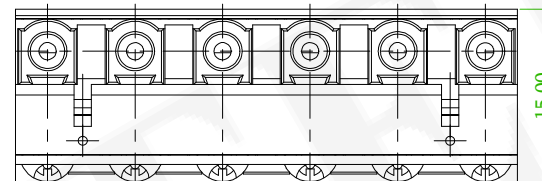
ORDER INFORMATION

5 T P 7 6 2 N - 2 K D N X X E L X - 0 1

Series No.

Poles
(02-16P)

E:Green

A:Tray
B:Bag

AMTEK 糧德

2020.10.15

Released DCC

linear dimension (Tolerances Standard GB/T 14486-2008)



variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

REV.1

ECN NO:200718 Revise the Tolerance

Alice

2020/09/25

REV.

ECN NO. OR DESCRIPTION

REVISED

DATE



糧德精密有限公司
 Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名

TITLE

7.62mm Terminal Block

品號

PART NO.

5TP762N-2KDNXXELX-01

圖號

DRAWING NO.

GN011-EA155

客戶品號

CUSTOMER P/N

公差

TOLERANCE

繪圖

DRAWN

頁數
Page

1/1

核對

CHECKED

承認

APPROVED

THIRD

ANGLE

PROJECTION

Eric

2018/12/03

Josh

2018/12/03

Jason

2018/12/03

UNIT

mm

None

mm