

ELECTRICAL

Standard: UL IEC
Rated Voltage: 300V 300V
Rated Current: 30A 10A
Wire Range: 28 to 10AWG
Withstanding Voltage: AC 1600V for one minute
Impulse withstand voltage: 6.0KV

MECHANICAL

Stripping Length: 8-9mm
Screw/Torque: M3/0.5
Temp. Range: -40°C to +105°C

MATERIAL

Housing: PA66, UL94V-0
Contact: Copper alloy, Sn plated

ORDER INFORMATION

5 T P 7 6 2 N - 3 E K E X X E L X - 0 1

Series No.

Poles
(02-24)

E: Green





A: Tray
B: Bag



AMTEK 糧德

2019.11.06

Released DCC

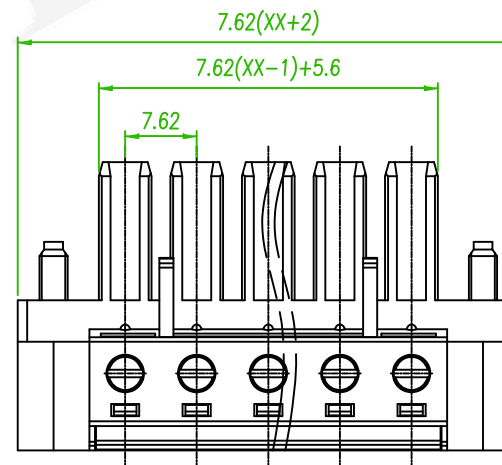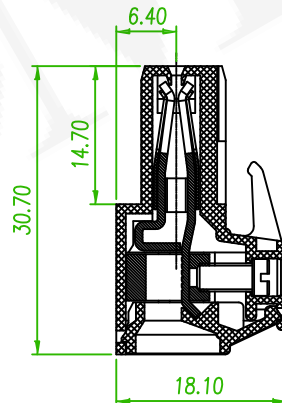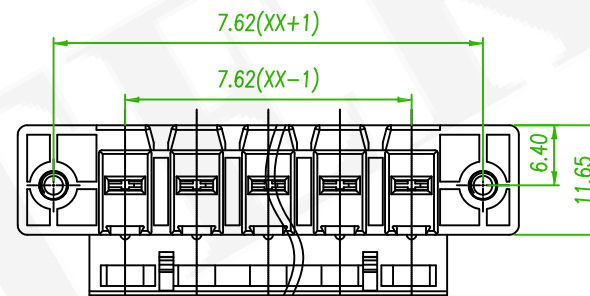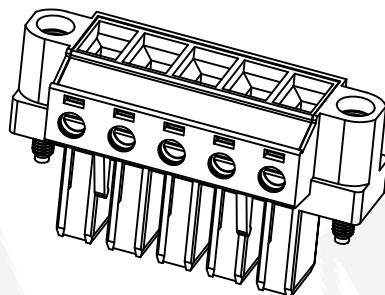

linear dimension (Tolerances Standard GB/T 14486-2008)

variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 300	over 300 to 600	over 600 to 1000
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	7.62mm Terminal Block				頁數 Page	1/1
品號 PART NO.	5TP762N-3EKEXXELX-01				繪圖 DRAWN	Nick 2019/11/05
圖號 DRAWING NO.	GN011-NI491	版本 REV.	A	核對 CHECKED	Josh 2019/11/05	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Josh 2019/11/05	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		