

ELECTRICAL

Standard: UL IEC
 Rated Voltage: 300V 400V
 Rated Current: 30A 32A
 Contact Resistance: 20mΩ
 Withstanding Voltage: AC 2000V for one min
 Insulation Resistance: 500MΩ
 Wire range: 28-10AWG 4mm²

MECHANICAL

Temp. Range: -40°C ~ +105°C
 Torque: 0.5Nm

MATERIAL

Housing: PA66, UL94V-0
 Screws: M3.0, Steel, Zn plated
 Clamp: Copper alloy, Sn plated
 Cage: Copper alloy, Ni plated

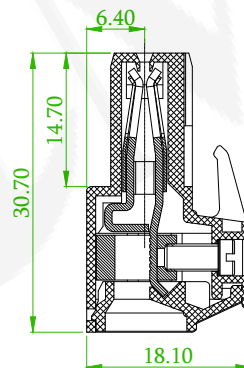
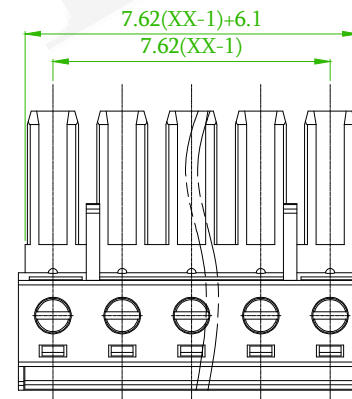
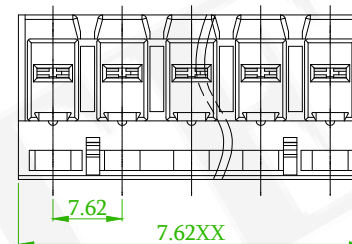
ORDER INFORMATION

5 T P 7 6 2 N - 3 E K N X X E L X - 0 1

Series No.

Poles
(02-24P)

E:Green

A:Tray
B:Bag

AMTEK 耀德

2020.10.15

Released DCC



linear dimension (Tolerances Standard GB/T 14486-2008)



variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 250	to 10	over 10 to 100	over 100 to 250
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60



ECN NO:200718 Revise the Tolerance

Alice

2020/09/25

REV.

ECN NO. OR DESCRIPTION

REVISED

DATE



耀德精密有限公司
 Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

品名
TITLE

7.62mm Terminal Block

頁數
Page

1/1

品號
PART NO.

5TP762N-3EKNXXELX-01

繪圖
DRAWNEric
2018/12/21圖號
DRAWING NO.

GN011-EA365

版本
REV.

B

核對
CHECKEDJosh
2018/12/21客戶品號
CUSTOMER P/N比例
SCALE

None

承認
APPROVEDJason
2018/12/21公差
TOLERANCE單位
UNIT

mm

THIRD
ANGLE
PROJECTION