

ORDER INFORMATION

ELECTRICAL



Standard: UL IEC
Rated Voltage: 300V 450V
Rated Current: 15A 17.5A
Contact Resistance: 20mΩ
Insulation Resistance: 500MΩ / DC 500V
Withstanding Voltage: AC 2000V for one minute

MECHANICAL



Temp.Range:-40°C~+105°C

MATERIAL


Housing: Nylon 66, UL94V-0
Clamp:Brass,Tin plated

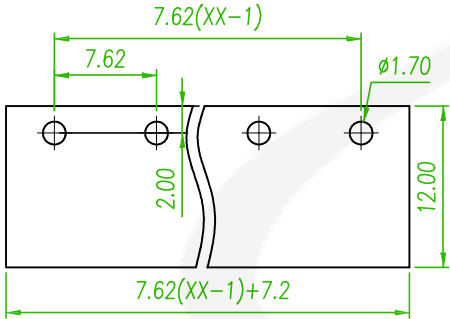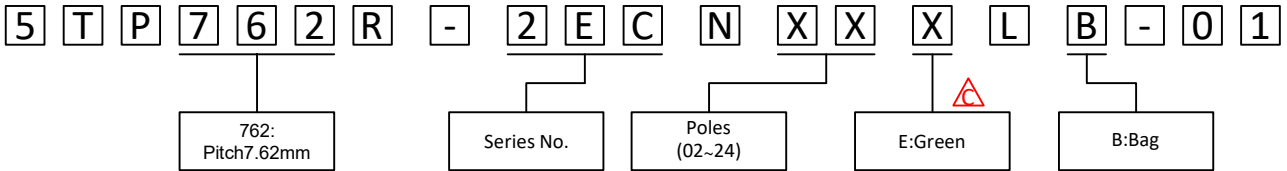

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

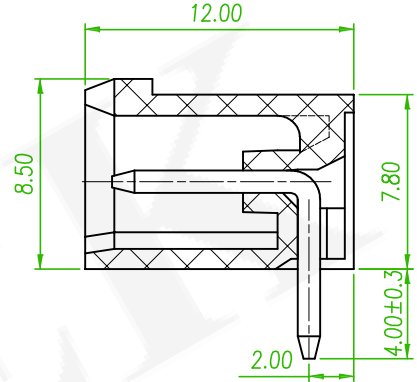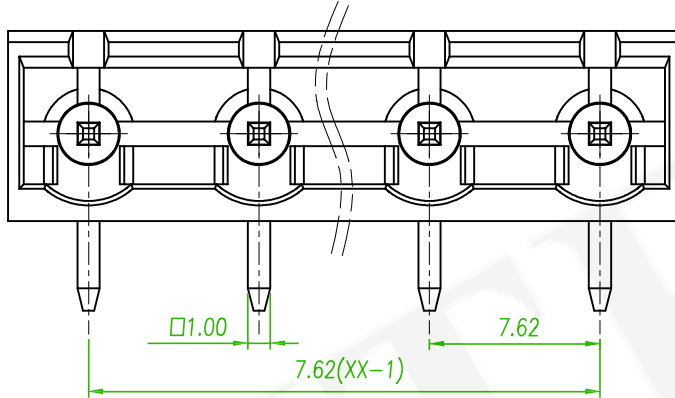

SECTION:A-A

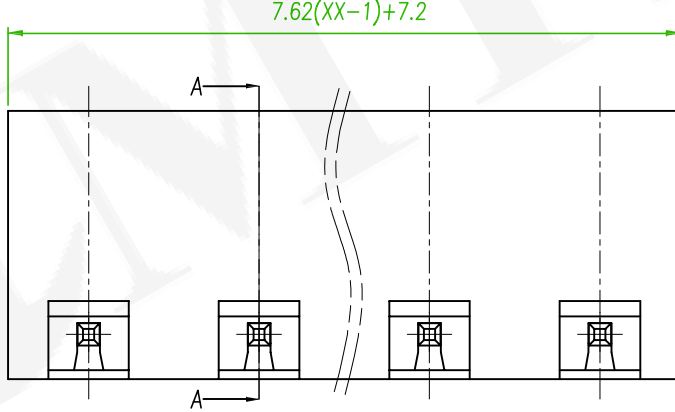

linear dimension(Tolerances Standard GB/T 14486-2008)								—	∕	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60
△	ECN NO.:231032 Revise the Options							Randy	2023/11/21	
△x1	ECN NO.:200718 Revise the Tolerance							Alice	2020/09/30	
REV.	ECN NO. OR DESCRIPTION							REVISED	DATE	

糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	7.62mm Terminal Block				頁數 Page	1/1
品號 PART NO.	5TP762R-2ECNXXXLB-01				繪圖 DRAWN	Mia 2016/12/05
圖號 DRAWING NO.	GN011-MC108	版本 REV.	C	核對 CHECKED	Jonny 2016/12/05	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/12/05	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		

Old Part No. :TB2ERC-7.62-XXP-1X-00A-L