

ELECTRICAL

Standard: UL IEC
Rated Voltage: 300V 400V
Rated Current: 30A 32A
Contact Resistance: 20mΩ
Withstanding Voltage: AC 1600V for one min
Insulation Resistance: 500MΩ

MECHANICAL

Temp. Range: -40°C ~ +105°C

MATERIAL

Housing: PA66, UL94V-0
Pin header: Copper alloy, Sn plated
Nut: Steel, Zn plated

ORDER INFORMATION

5 T P 7 6 2 R - 3 E M E X X E L X - 0 1

Series No.





Poles
(02-24P)

E:Green

A:Tray
B:Bag



AMTEK 糧德
2020.10.16
Released DCC

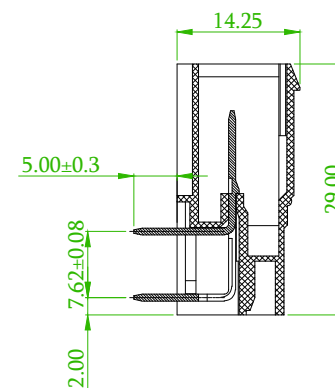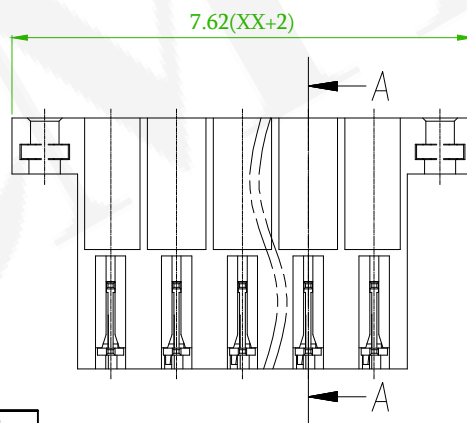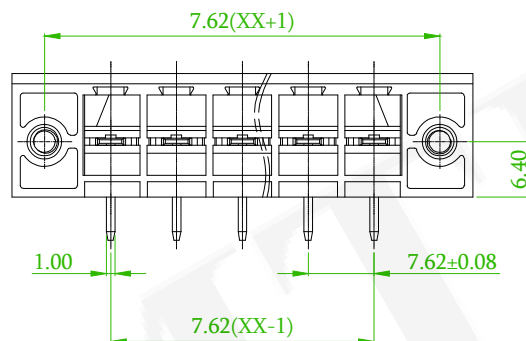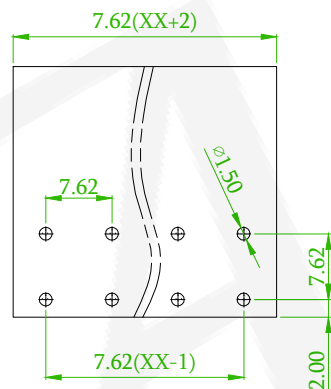

linear dimension(Tolerances Standard GB/T 14486-2008)



variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	to 10	over 10 to 100	over 100 to 100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

REV.	ECN NO. OR DESCRIPTION	REVISED	DATE
	ECN NO:200718 Revise the Tolerance	Alice	2020/09/30



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	7.62mm Terminal Block				頁數 Page	1/1
品號 PART NO.	5TP762R-3EMEXXELX-01				繪圖 DRAWN	Eric 2018/12/21
圖號 DRAWING NO.	GN011-EA369				核對 CHECKED	Josh 2018/12/21
客戶品號 CUSTOMER P/N					承認 APPROVED	Jason 2018/12/21
公差 TOLERANCE					比例 SCALE	None
					單位 UNIT	mm
					THIRD ANGLE PROJECTION	