

Electrical

Standard: UL IEC
Rated Voltage: 300V 450V
Rated Current: 15A 17.5A
Contact Resistance: 20mΩ
Insulation Resistance: 500MΩ / DC 500V
Dielectric Voltage: AC 2000V for one minute
Temp. Range: -40°C ~ +105°C
Max Soldering: +250°C for 5 Sec

Material

Housing: PA66, UL94V-0
Contact: Brass, Tin plated
Nut: M2.5 Brass

ORDER INFORMATION


5 T P 7 6 2 S - 2 E V E X X E L X - 0 1

Series No.


No. of Poles
(02~24P)

E: Green

B: Bag
A: Tray

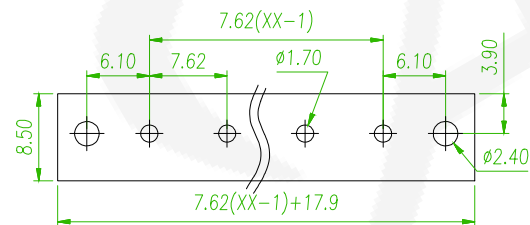

PCB LAYOUT

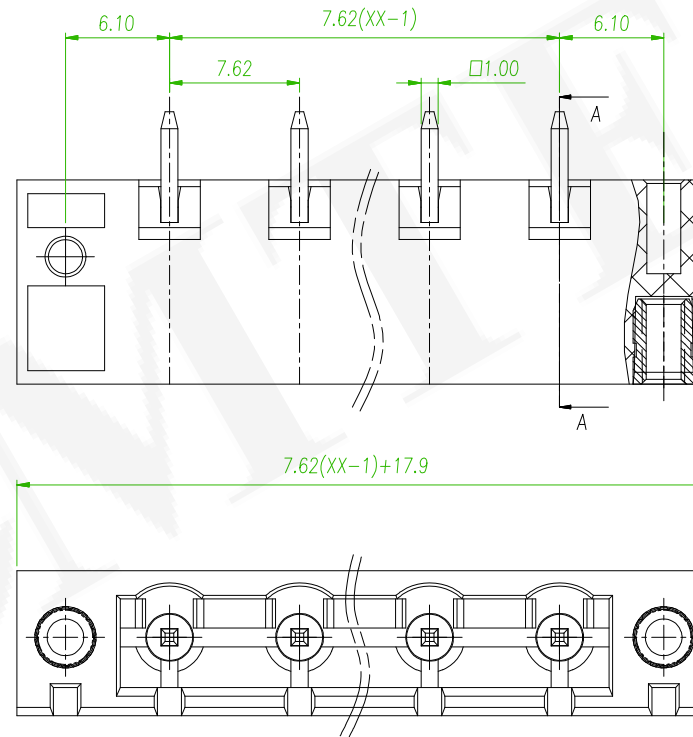

SECTION A-A



linear dimension (Tolerances Standard GB/T 14486-2008)



variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 250	— to 10	∠ over 10 to 100	⊥ over 100 to 250
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60



ECN NO: 200718 Revise the Tolerance

Alice

2020/12/24

REV.

ECN NO. OR DESCRIPTION

REVISED

DATE



糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	Terminal Block				頁數 Page	1/1
品號 PART NO.	5TP762S-2EVEXXELX-01				繪圖 DRAWN	David 2020/03/20
圖號 DRAWING NO.	GN011-DV932		版本 REV.	B	核對 CHECKED	Josh 2020/03/20
客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Josh 2020/03/20
公差 TOLERANCE			單位 UNIT	mm	THIRD ANGLE PROJECTION	