


ELECTRICAL

Standard: UL IEC
 Rated Voltage: 300V 400V
 Rated Current: 30A 32A
 Contact Resistance: 20mΩ
 Withstanding Voltage: AC 1600V for one min
 Insulation Resistance: 500MΩ

ORDER INFORMATION

5 T P 7 6 2 S - 3 E M E X X E L X - 0 1

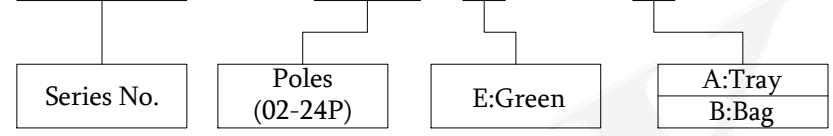


MECHANICAL

Temp. Range: -40°C ~ +105°C

MATERIAL

Housing: PA66, UL94V-0
 Pin header: Copper alloy, Sn plated
 Nut: Steel, Zn plated

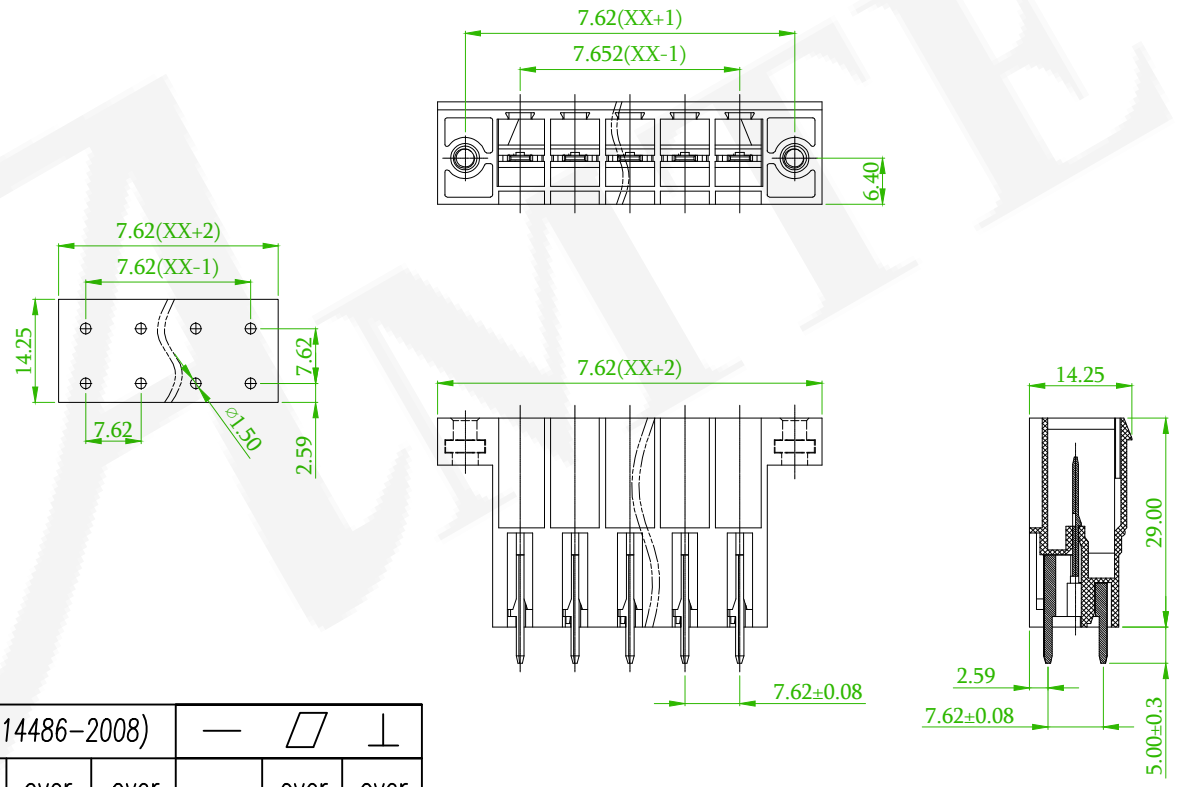

| linear dimension (Tolerances Standard GB/T 14486-2008) | | | | | | | | — | ∕ | ⊥ |
|--|-------|--------------|---------------|---------------|----------------|-----------------|----------------|----------------|-----------------|------|
| variable range | to 6 | over 6 to 10 | over 10 to 30 | over 30 to 60 | over 60 to 100 | over 100 to 160 | over 160 to 10 | over 10 to 100 | over 100 to 100 | |
| tolerance | ±0.20 | ±0.30 | ±0.50 | ±0.70 | ±1.00 | ±1.30 | ±1.60 | 0.10 | 0.30 | 0.60 |

| | | | |
|------|------------------------------------|---------|------------|
| REV. | ECN NO. OR DESCRIPTION | REVISED | DATE |
| △x1 | ECN NO:200718 Revise the Tolerance | Alice | 2020/09/30 |

糧德精密有限公司
 Amtek Technology Co., Ltd.
 TEL: 886-2-2260-6878
 FAX: 886-2-2260-8030

| | | | | | | |
|----------------------|-----------------------|--|-------------|-------------|------------------------|---------------------|
| 品名 TITLE | 7.62mm Terminal Block | | | | 頁數 Page | 1/1 |
| 品號 PART NO. | 5TP762S-3EMEXXELX-01 | | | 繪圖 DRAWN | Eric 2018/12/21 | |
| 圖號 DRAWING NO. | GN011-EA367 | | 版本 REV. | B | 核對 CHECKED | Josh 2018/12/21 |
| 客戶品號 CUSTOMER P/N | | | 比例 SCALE | None | 承認 APPROVED | Jason 2018/12/21 |
| 公差 TOLERANCE | | | 單位 UNIT | mm | THIRD ANGLE PROJECTION | |