

ORDER INFORMATION

ELECTRICAL

Standard: UL IEC
Rated Voltage: 150V 63V
Rated Current: 4A 6A
Wire range: 26~18AWG 0.2~0.5mm²
Withstanding Voltage: AC 1300V for one minute

5 T R 2 5 4 S - 1 4 1 N X X X L A - W 1

254:
Pitch 2.54mm

Series No.

No of Pins total
(01-30)

G:Gray
U:Blue
B:Black
E:Green

O:Orange
R:Red
T:Transparent
N:Brown

A:Tray W/O Cap






MECHANICAL

Strip Length: 11mm
Temp. Range: -40°C~+105°C

MATERIAL

Housing: PA66, UL94V-0
Pin header: Copper Alloy, Tin plated

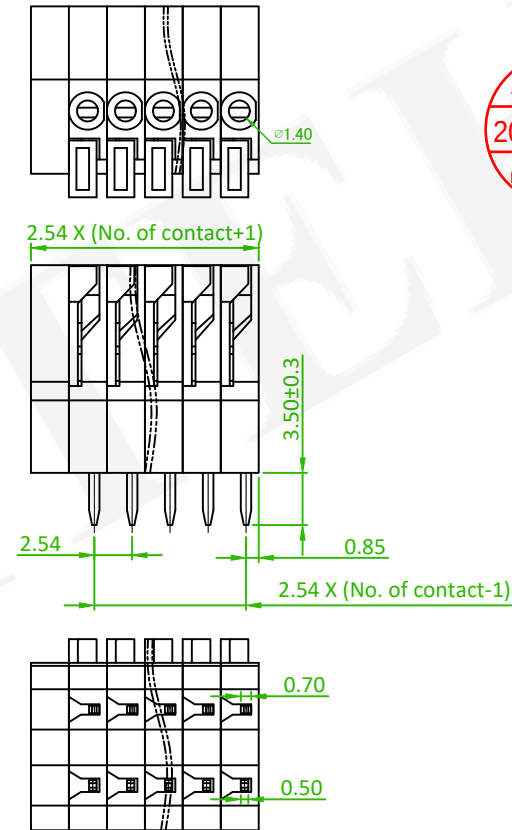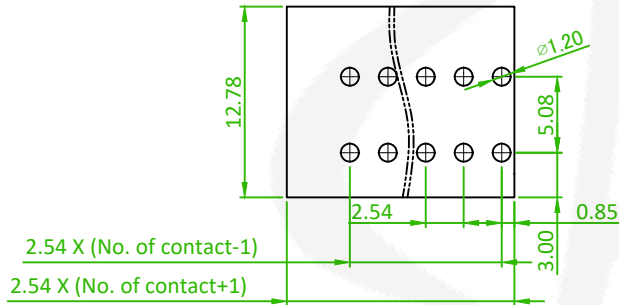

AMTEK 耀德
2022.11.09
Released DCC

linear dimension (Tolerances Standard GB/T 14486-2008)

variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to 100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30

ECN NO: 221015	Revise the drawing & SPEC.	Tim	2022/11/04
ECN NO: 201126	Revise the PART NO.	Alice	2020/12/11
ECN NO: 200718	Revise the Tolerance	Alice	2020/10/05
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

AMTEK

耀德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	Terminal Block				頁數 Page	1/1
品號 PART NO.	  5TR254S-141NXXXLA-W1			繪圖 DRAWN	Mia 2016/08/22	
圖號 DRAWING NO.	GN116-MC270		版本 REV.	F	核對 CHECKED	Jonny 2016/08/22
客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Aaron 2016/08/22
公差 TOLERANCE			單位 UNIT	mm	THIRD ANGLE PROJECTION	

Old Part No. : TB141V-2.54-XXP-1X-00A-L