

ELECTRICAL

Standard: UL IEC
Rated Voltage: 300V 160V
Rated Current: 10A 17.5A
Withstanding Voltage: AC 1600V for one min
Wire range: 24-16AWG 0.2~1.5mm²

MECHANICAL

Temp. Range: -40°C ~ +130°C
Steip length: 7-8mm

MATERIAL

Housing: LCP, UL94V-0
Pin header: Copper alloy, Sn plated

ORDER INFORMATION


5 T R 3 5 0 M - 1 2 S N X X X U X - 0 1

Series No. Poles (02-24P) B:Black A:Tray




AMTEK 糧德

2024.01.03

Released DCC

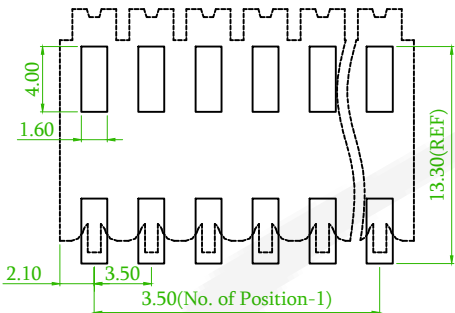

Rrcommened P.C.B Layout
(PCB TOLERANCE±0.05)

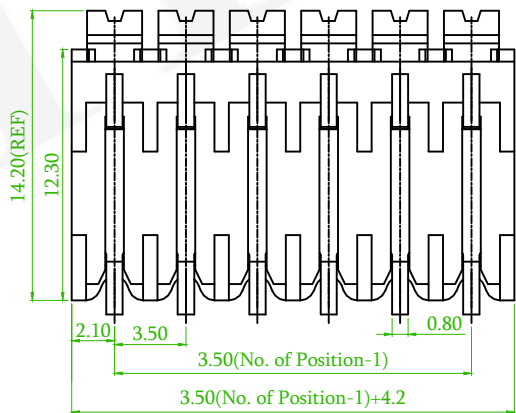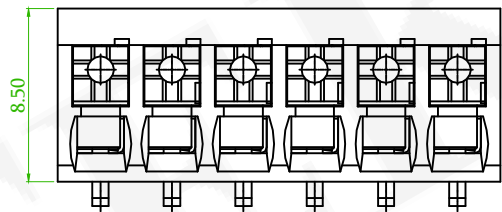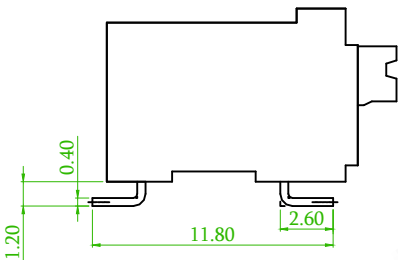

linear dimension(Tolerances Standard GB/T 14486-2008)



variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

△	ECN NO:231017 Revise the Packaging options	Gaby	2023/10/27
△	ECN NO:230714 Revise the PART NO.	Gaby	2023/09/23
△	ECN NO:230831 Revise the Electrical	Gaby	2023/09/14
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	3.5mm Terminal Block				頁數 Page	1/1
品號 PART NO.	△ 5TR350M-12SNXXXUX-01 △				繪圖 DRAWN	Eric 2018/12/27
圖號 DRAWING NO.	GN011-EA406	版本 REV.	F	核對 CHECKED	Josh 2018/12/27	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/12/27	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		