

ELECTRICAL

Standard: UL IEC
Rated Voltage: 300V 250V
Rated Current: 10A 24A
Withstanding Voltage: AC 1600V for one min
Wire range: 26-14AWG

MECHANICAL

Strip Length : 5-6mm
Temp. Range : -40°C ~ +105°C

MATERIAL

Housing : PA66, UL94V-0
Pin Header : Copper Alloy, Tin Plated

ORDER INFORMATION


5 T R 5 0 8 L - 2 4 5 N X X X L X - 0 1

Series No.



Poles
(01~30)

G:Gray

B:Bag
A:Tray

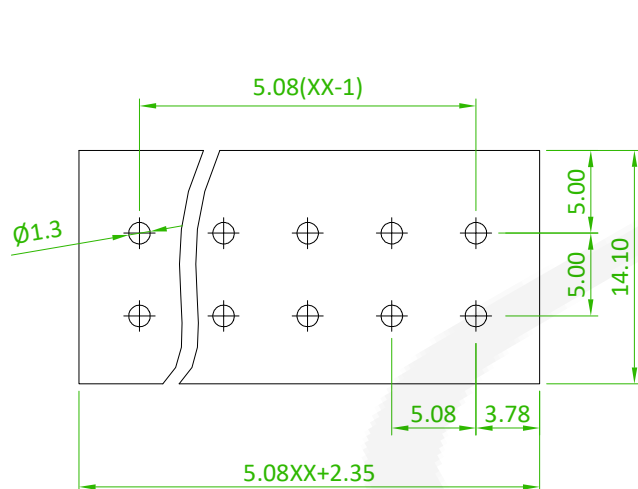

Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

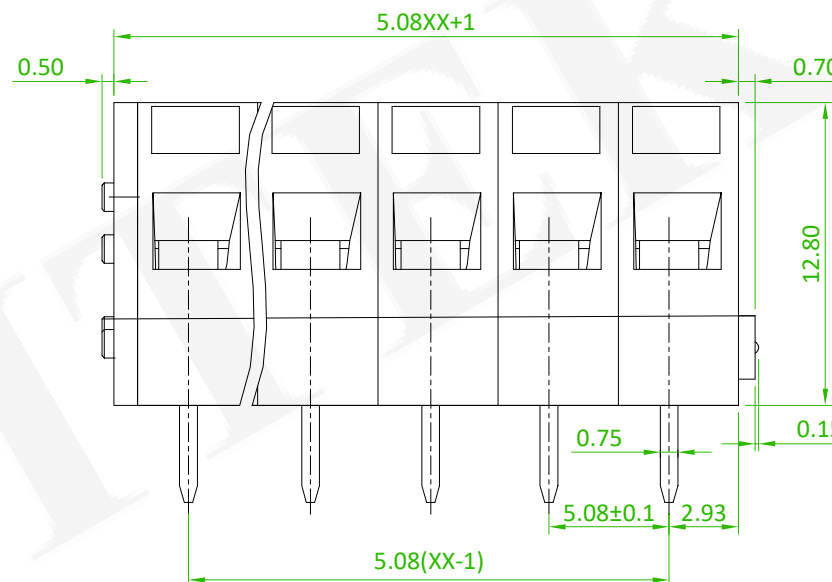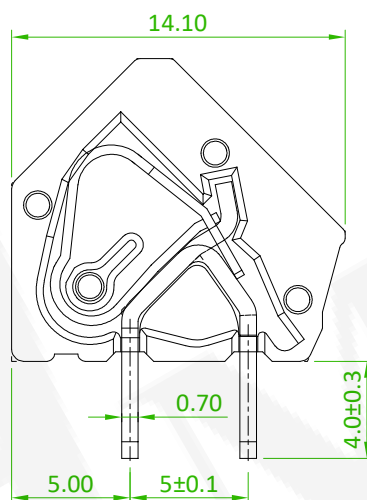

linear dimension(Tolerances Standard GB/T 14486-2008)								—	∕	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

△	ECN NO.: 230714 Revise the PART NO	Randy	2023/09/23
△	ECN NO:201126 Revise the PART NO.	Alice	2020/12/14
△	Add the packing option.	Roy	2018/11/28
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE


耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	5.08mm Terminal Block				頁數 Page	1/1
品號 PART NO.	△ 5TR508L-245NXXXLX-01 △				繪圖 DRAWN	Mia 2018/02/09
圖號 DRAWING NO.	GN011-MC953		版本 REV.	D	核對 CHECKED	Josh 2018/11/28
客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Jason 2018/11/28
公差 TOLERANCE			單位 UNIT	mm	THIRD ANGLE PROJECTION	