

ELECTRICAL

Standard: UL IEC
Rated Voltage: 300V 450V
Rated Current: 10A 15A
Contact Resistance: 20MΩ
Withstanding Voltage: AC 2000V for one min
Insulation Resistance: 500MΩ / DC 500V
Wire range:26-14AWG 1.5mm²

MECHANICAL

Strip Length : 5-6mm
Temp. Range : -40°C ~ +105°C
MAX soldering :+250°C , 5 Sec

MATERIAL

Housing : PA 66, UL94V-0
Pin Header : Brass,Tin Plated
Wire Guard:Stainless steel

ORDER INFORMATION

5 T R 7 5 0 L - 2 4 5 N X X X L X - 0 1






Series No.

No of Pins total
(02~24P)

G:Gray

B:Bag

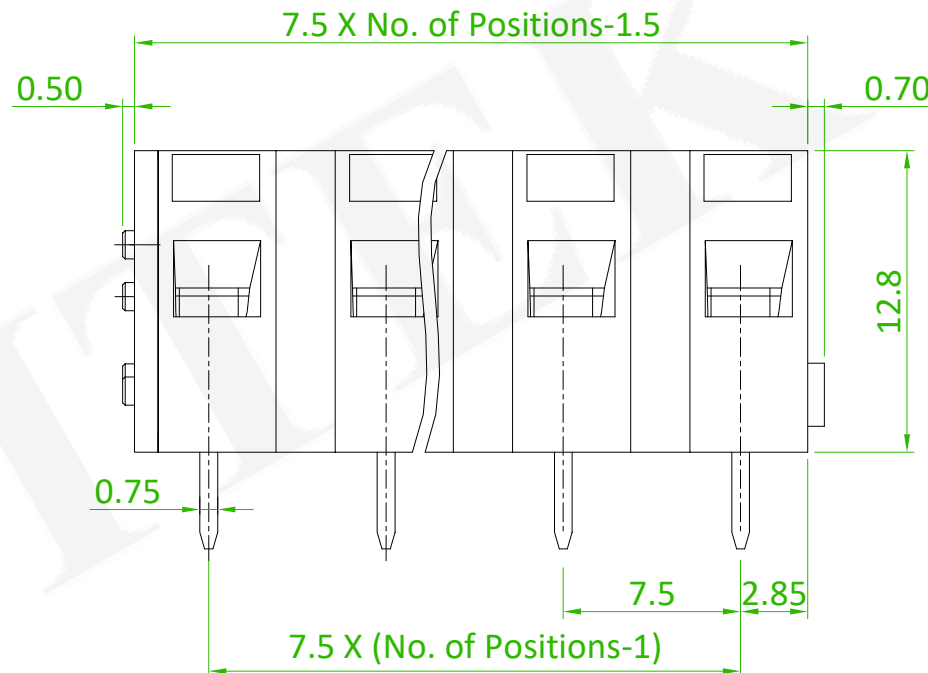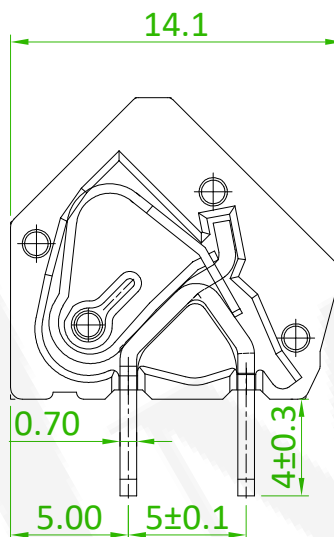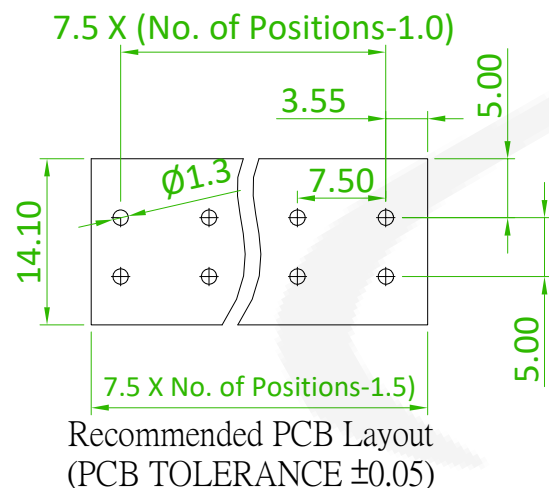

linear dimension(Tolerances Standard GB/T 14486-2008)

— □ ⊥

variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 250	to 10	over 10 to 100	over 100 to 250
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

△	ECN NO:230714 Revise the PART NO.	Randy	2023/09/23
△x2	ECN NO:201126 Revise the PART NO.	Alice	2020/12/15
△x1	ECN NO:200718 Revise the Tolerance	Alice	2020/10/13
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE

耀德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

Old Part No.:TB245-7.5-XXP-1X-00A-L

品名 TITLE	Terminal Block				頁數 Page	1/1
品號 PART NO.	△ 5TR750L-245NXXXLX-01△				繪圖 DRAWN	Mia 2018/02/09
圖號 DRAWING NO.	GN011-MC952	版本 REV.	D	核對 CHECKED	Josh 2018/02/09	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/02/09	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		