

Standard:	UL	IEC
Rated Voltage:	300V	630V
Rated Current:	10A	21A
Contact Resistance:	20mΩ	
Withstanding Voltage:	AC 2000V	
Insulation Resistance:	500MΩ	

MECHANICAL

Temp. Range: -40°C ~ +105°C

Steip length: 6-7mm

MATERIAL

Housing: PA66, UL94V-0

Pin header: Copper alloy, Sn plated

Shrapnel: Stainless steel

ORDER INFORMATION

5 T R 7 5 0 L -


X L

G:Gray




Diagram illustrating a sequence of operations on a stack:

- Initial stack state: A:Tray, B:Bag
- Operation: Push X
- Operation: Push -
- Operation: Push 0
- Operation: Push 1

The stack now contains: X, -, 0, 1 (from bottom to top).

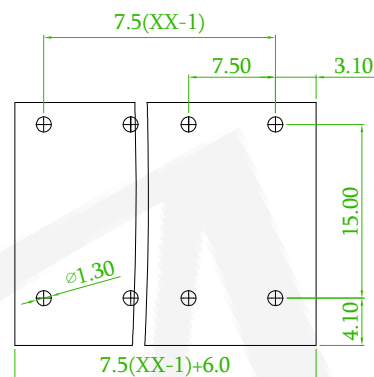

Recommended PCB Layout
(PCB TOLERANCE ± 0.05)

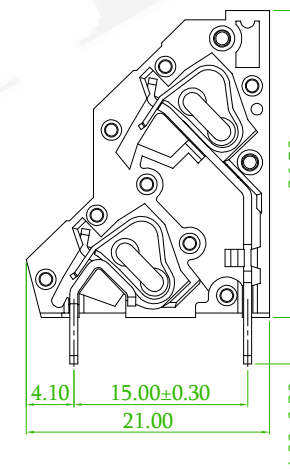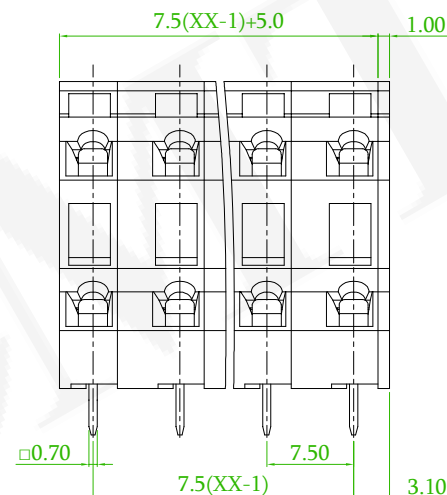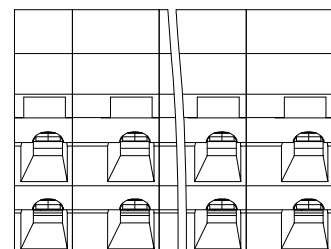

linear dimension(Tolerances Standard GB/T 14486-2008)

—	$\parallel$	$\perp$
to 10	over 10 to 100	over 100 to
0.10	0.30	0.60

	ECN NO:230714 Revise the PART NO.	Randy	2023/09/23
 x1	ECN NO:220814 Revise the PART NO.	Tim	2022/09/16
 x2	ECN NO:201126 Revise the PART NO.	Alice	2020/12/15
REV.	ECN NO. OR DESCRIPTION	REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	7.50mm Terminal Block				頁數 Page	1/1
品號 PART NO.	⚠ 5TR750L-4T2NXXXXLX-01 ⚠			繪圖 DRAWN	Eric 2018/12/26	
圖號 DRAWING NO.	GN011-EA388		版本 REV.	E	核對 CHECKED	Josh 2018/12/26
客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Jason 2018/12/26
公差 TOLERANCE			單位 UNIT	mm	THIRD ANGLE PROJECTION	