




Electrical
Standard: UL IEC
Rated Voltage: 300V 250V
Rated Current: 10A 13.5A
Contact Resistance: 20mΩ
Insulation Resistance: 500MΩ / DC 500V
Wire Range:28~16AWG 1.0mm²
Withstanding Voltage: AC 2000V for one min

Mechanical
Temp. Range: -40°C ~ +105°C
Soldering Max:+250°C 5s
Torque(Max):0.2Nm(1.7Lb.in)


Dimensions
Pitch: 3.5mm
Poles:2-24P

Material
Housing: PA66, UL94V-0
Screws:M2.0 Steel,Zn Plated
Pin Header:Brass,Tin plated
Cage:Brass:Brass,Nickel Plated


ORDER INFORMATION

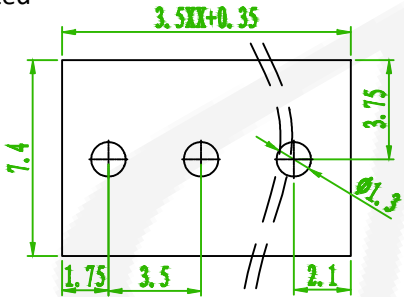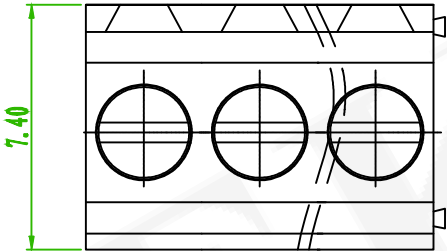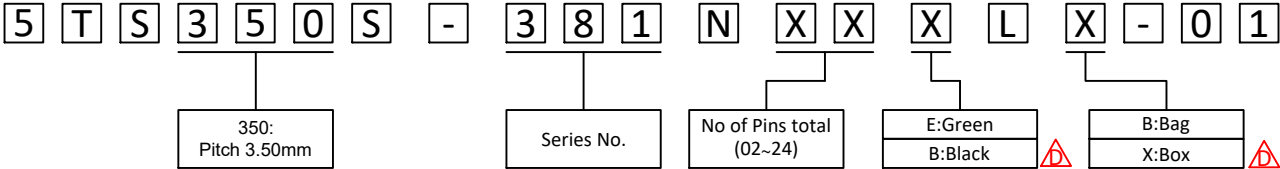

P.C.B. LAYOUT

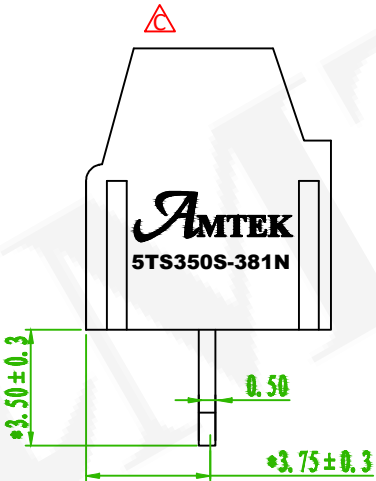

SECTION: A-A

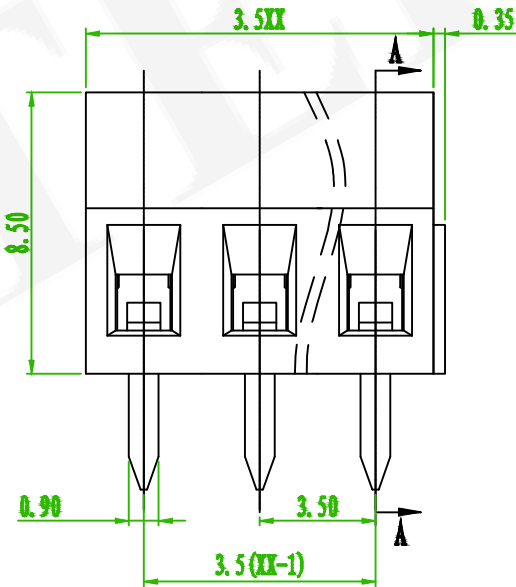

linear dimension(Tolerances Standard GB/T 14486-2008)								—	∕	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 300	to 10	over 10 to 100	over 100 to 300
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60
△	EasyFlow:202309280004							Alice	2023/10/02	
△x1	ECN NO:210508 Add the LOGO							Benson	2021/06/06	
△x1	ECN NO:200718 Revise the Tolerance							Alice	2020/12/04	
REV.	ECN NO. OR DESCRIPTION							REVISED	DATE	


糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	Terminal Block				頁數 Page	1/1
品號 PART NO.	△ 5TS350S-381NXXXLX-01			繪圖 DRAWN	Roy 2016/03/03	
圖號 DRAWING NO.	GN011-AL620			版本 REV.	D	核對 CHECKED
客戶品號 CUSTOMER P/N				比例 SCALE	None	承認 APPROVED
公差 TOLERANCE				單位 UNIT	mm	THIRD ANGLE PROJECTION