

Electrical


Standard: UL IEC
Rated Voltage: 300V 160V
Rated Current: 10A 13.5A
Contact Resistance: 20mΩ
Insulation Resistance: 500MΩ
Dielectric Voltage: AC 1600V for one minute
Wire Range: 28-16AWG 1.0mm²
Temp. Range: -40°C ~ +105°C
Steip Length: 4-5mm

Material


Housing: PA66, UL94V-0
Contact: Copper Alloy, Sn plated

ORDER INFORMATION



5	T	S	3	8	1	S	-	3	8	B	N	X	X	E	L	X	-	0	1
Series No.								No. of Poles (02~24P)				E: Green			B: Bag A: Tray				

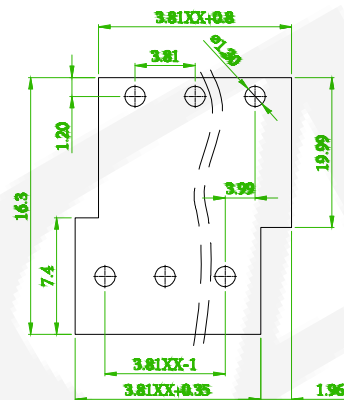

Recommended PCB Layout
(PCB TOLERANCE ±0.1)

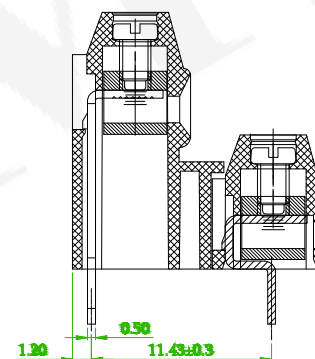

SECTION A-A

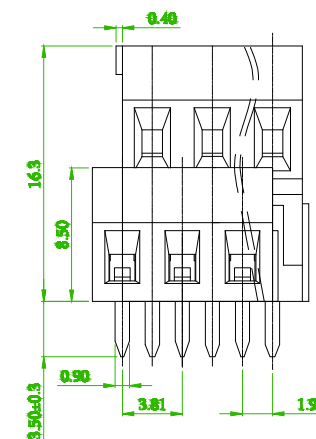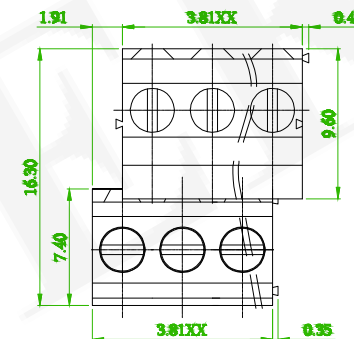

linear dimension (Tolerances Standard GB/T 14486-2008)								—	□	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	to 10	over 10 to 100	over 100 to 100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60



REV.	ECN NO. 200718 Revise the Tolerance	Alice	2020/12/25
	ECN NO. OR DESCRIPTION	REVISED	DATE


糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	Terminal Block				頁數 Page	1/1
品號 PART NO.	5TS381S-38BNXXELX-01				繪圖 DRAWN	Eric 2018/12/07
圖號 DRAWING NO.	GN011-EA209	版本 REV.	B	核對 CHECKED	Jason 2018/12/07	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Jason 2018/12/07	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		