

ELECTRICAL

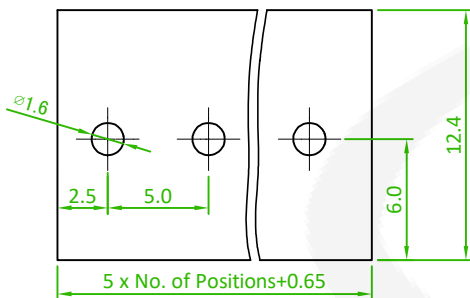
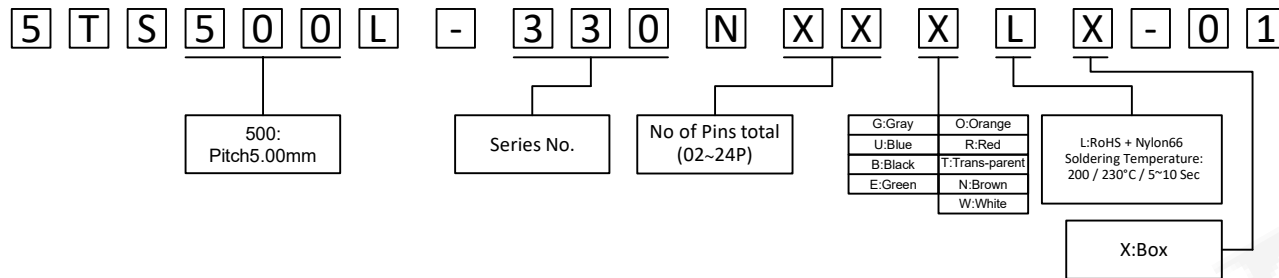
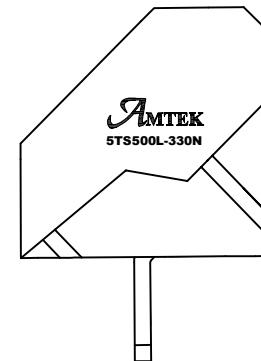
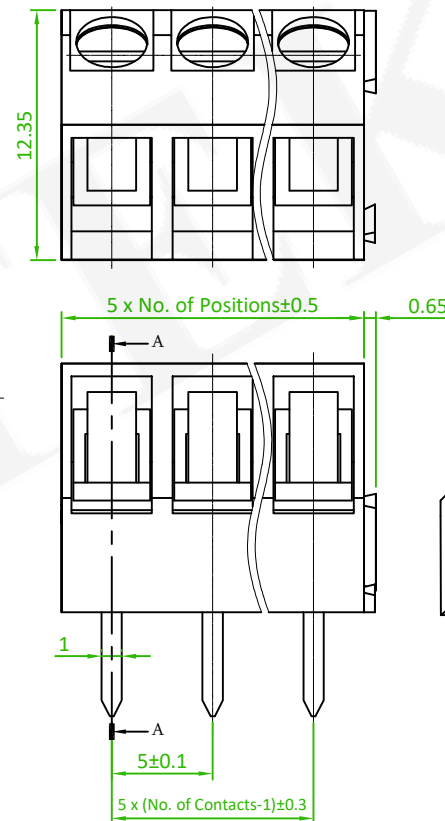
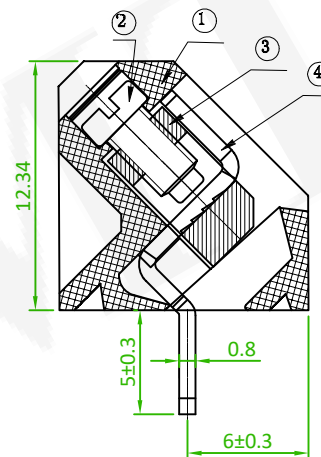
Standard: UL IEC
Rated Voltage: 300V 250V
Rated Current: 15A 18A
Contact Resistance: 20mΩ
Insulation Resistance: 500MΩ/DC500V
Wire range: 22~14AWG 1.5mm²
Withstanding Voltage: AC 2000V for one minute

MECHANICAL

Torque: 0.4Nm
Steip Length: 4.5~5mm
Temp. Range: -40°C~+105°C
Max Soldering: +250°C, for 5 Sec

MATERIAL

Housing: PA66, UL94V-0
Screws: M2.5 Steel, Zn plated
Pin Header: Brass, Tin plated
Cage: Brass, Ni plated

ORDER INFORMATION**P.C.B. LAYOUT**

Old Part No. :TB330-5.0-XXP-1X-00A-L

linear dimension (Tolerances Standard GB/T 14486-2008)



variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

Add the AMTEK Logo

Randy

2023/07/07

ECN NO.: 170916, Revise the drawing

Mia

2017/09/21

ECN NO. OR DESCRIPTION

REVISED

DATE



糧德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	Terminal Block				頁數 Page	1/1
品號 PART NO.	5TS500L-330NXXXLX-01				繪圖 DRAWN	Mia 2016/08/30
圖號 DRAWING NO.	GN011-MC659	版本 REV.	C	核對 CHECKED	Jonny 2016/08/30	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	Aaron 2016/08/30	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		