





Electrical
Standard: UL IEC
Rated Voltage: 300V 250V
Rated Current: 20A 24A
Contact Resistance: 20mΩ
Insulation Resistance: 500MΩ / DC 500V
Withstanding Voltage: AC 2000V for one min
Wire range:24~12AWG 2.5mm²

Mechanical
Temp. Range: -40°C ~ +105°C
Soldering Max:+250°C 5s
Torque(Max):0.4Nm(3.6Lb.in)
Steip Length:12-13mm

Dimensions
Pitch: 5.0mm
Poles:2-30P

Material
Housing: PA66, UL94V-0
Screws:M2.5 Steel,Zn Plated
Pin header:Brass 0.8t Tin plated
Cage:Steel Zn plated
Slide block:Steel Zn plated

ORDER INFORMATION

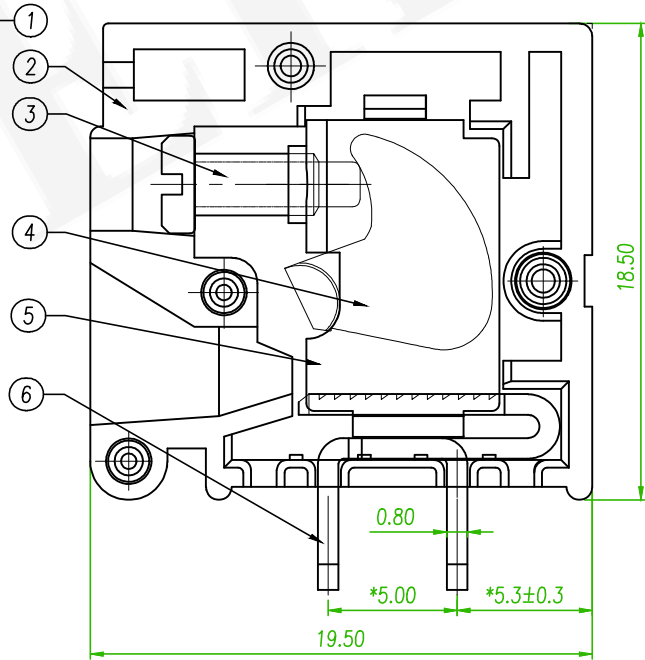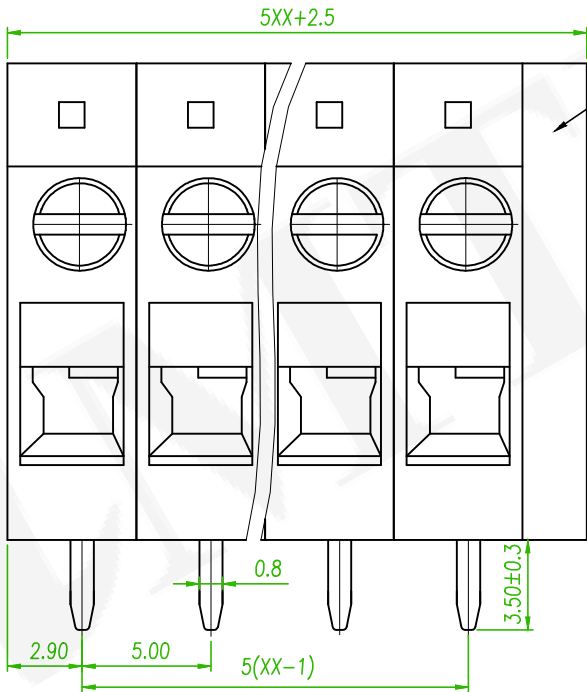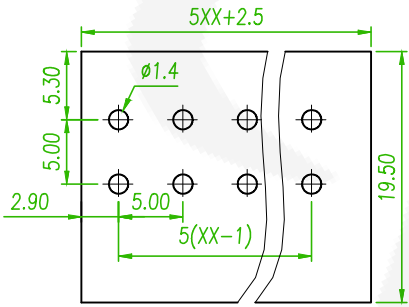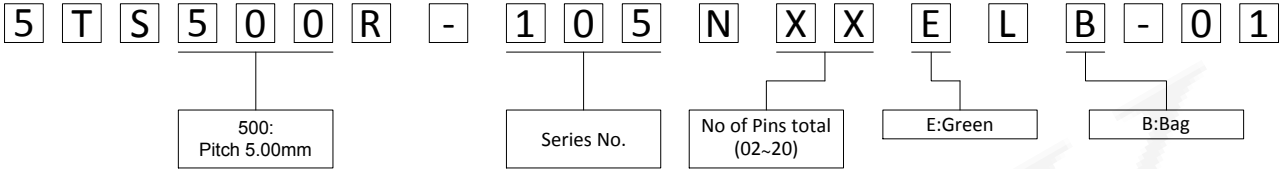

A

linear dimension(Tolerances Standard GB/T 14486-2008)								—	∕	⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60
REV.	ECN NO. OR DESCRIPTION								REVISED	DATE



糧德精密有限公司
Amtek Technology Co., Ltd.
TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	Terminal Block				頁數 Page	1/1
品號 PART NO.	5TS500R-105NxxELB-01				繪圖 DRAWN	Mia 2016/05/31
圖號 DRAWING NO.	GN011-AL621	版本 REV.	B	核對 CHECKED	Wanling 2016/05/31	
客戶品號 CUSTOMER P/N		比例 SCALE	None	承認 APPROVED	John 2016/05/31	
公差 TOLERANCE		單位 UNIT	mm	THIRD ANGLE PROJECTION		