

ELECTRICAL

Standard: UL IEC
 Rated Voltage: 300V 250V
 Rated Current: 20A 24A

Contact Resistance: 20mΩ

Withstanding Voltage: AC 2000V for one min

Insulation Resistance: 500MΩ

Wire range: 24-12AWG 2.5mm²

MECHANICAL

Temp. Range: -40°C ~ +105°C

Strip length: 12-13mm

Torque: 0.4Nm

MATERIAL

Housing: PA66, UL94V-0

Screws: M2.5 Steel Zn plated

Pin header: Copper 0.8t, Tin plated

Cage: Steel Zn plated

Slide block: Steel Zn plated

ORDER INFORMATION

5 T S 5 0 0 R - 1 5 A N X X E L X - 0 1

Series No.

Poles
(02-30P)

E:Green


A:Tray
B:Bag





AMTEK 耀德

2020.12.15

Released DCC

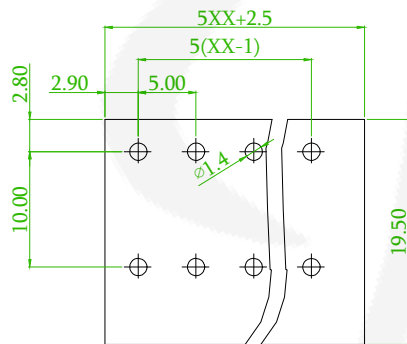

P.C.B. LAYOUT

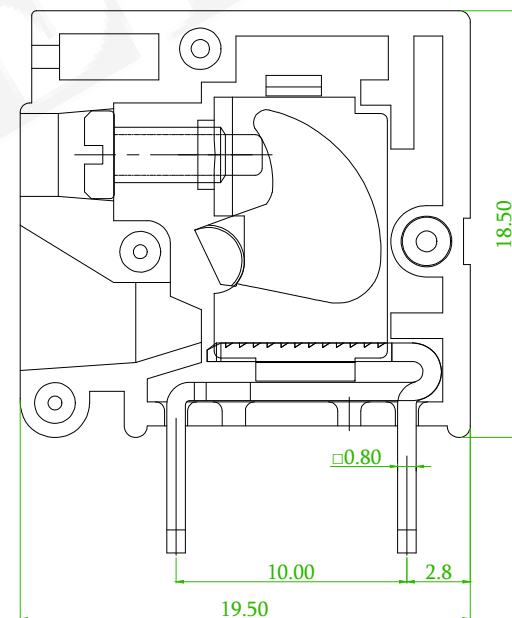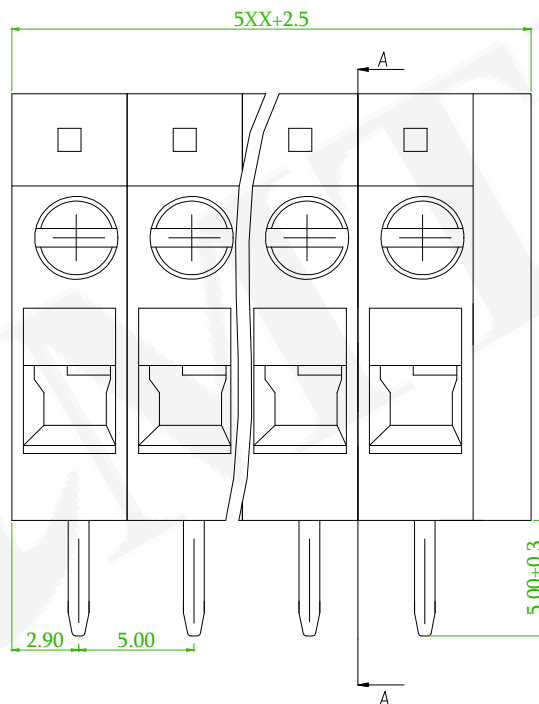

SECTION:A-A

linear dimension(Tolerances Standard GB/T 14486-2008)



variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60

△Bx1

ECN NO:200718 Revise the Tolerance

Alice

2020/12/07

REV.

ECN NO. OR DESCRIPTION

REVISED

DATE



耀德精密有限公司
Amtek Technology Co., Ltd.

TEL: 886-2-2260-6878
FAX: 886-2-2260-8030

品名 TITLE	5.0mm Terminal Block				頁數 Page	1/1
品號 PART NO.	5TS500R-15ANXXELX-01				繪圖 DRAWN	Eric 2018/11/23
圖號 DRAWING NO.	GN011-EA086		版本 REV.	B	核對 CHECKED	Josh 2018/11/23
客戶品號 CUSTOMER P/N			比例 SCALE	None	承認 APPROVED	Jason 2018/11/23
公差 TOLERANCE			單位 UNIT	mm	THIRD ANGLE PROJECTION	